


BOOK OF ABSTRACT




T h e m e
"Enhancing the **quality** of science and engineering
through **sustainable research** and development to face
ASEAN Economic Community challenges."

BANDA ACEH - INDONESIA
October 25-26, 2016

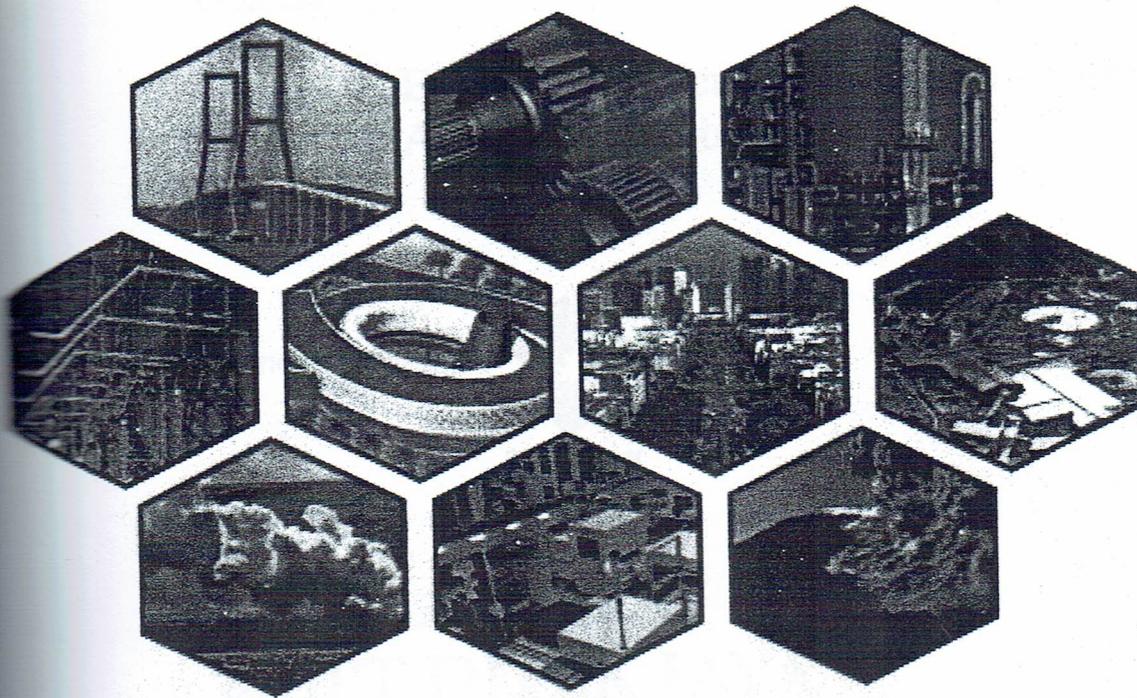

In association with




BKS PTN Barat

Sponsored by:



PT DITEK JAYA
Analytical & Measuring Instruments

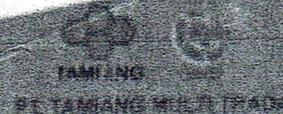

PT TANIANG

PT TANIANG MULTIPRAKSA

Supported by:



PT TANIANG MULTIPRAKSA

CONFERENCE IN BRIEF

Faculty of Engineering Syiah Kuala University was founded in 1963. The existing Engineering Faculty in Syiah Kuala University was driven by the needs of skilled manpower in the field of engineering to fill the human resource development in the province of Aceh. This was with the discovery of natural gas which is abundant in the area of North Aceh district. And now the Faculty of Engineering has been managing 11 study programs consist of Civil Engineering, Mechanical Engineering, Chemical Engineering, Electrical Engineering, Architectural Engineering, Geophysics, Geology, Industrial Engineering, Mining Engineering, Urban and Regional Planning, and Computer Engineering. FT Unsyiah has vision to be the leading education and research institution that is capable to compete in national and global levels.

As its founding background and vision, the FT Unsyiah is required to play an important role in the ASEAN Economic Community Trade Area, particularly to produce qualified graduates with highly honour moral and ethical values. The International Conference on Engineering and Science for Research and Development (ICESReD) is a part of various efforts to achieve this goal. This conference will be carried out biannually by Faculty of Engineering Syiah Kuala University

Organized by :



Engineering Faculty, Syiah Kuala University, Banda Aceh – Indonesia

Partnering with :



BKS PTN Barat

Sponsored by :

 **PT DITEK JAYA**
Analytical & Measuring Instruments

 **GeneCraft Labs**
DISTRIBUTOR OF *thermo*scientific

COMMITTEE

Advisory Committees

Prof. Dr. Ir. Samsul Rizal, M.Eng.; Syiah Kuala University - Indonesia
Dr. Hizir, Syiah Kuala University - Indonesia
Dr. Mirza Irwansyah, M.L.A., MBA.; Syiah Kuala University - Indonesia
Dr. Rizal Munadi, ST., M.Sc.; Syiah Kuala University - Indonesia

Organizing Committees

Chairman : Dr. Edi Munawar, S.T., M.Eng, .; Syiah Kuala University - Indonesia
Secretary : Dr. Ashfa, S.T., M.T. .; Syiah Kuala University - Indonesia

Scientific Committee

Dr. Nasrul Arahman, ST, MT .; Syiah Kuala University - Indonesia
Dr. Cut Dewi, M.Sc .; Syiah Kuala University - Indonesia
Dr. Fitri Arnia, ST., M. Eng .; Syiah Kuala University - Indonesia
Dr. Renny Anggraini, ST., M.Eng .; Syiah Kuala University - Indonesia
Dr. Syifaul Huzni, ST., M. Eng .; Syiah Kuala University - Indonesia
Dr. Syafrizal Phonna, ST., M.Sc .; Syiah Kuala University - Indonesia
Assoc. Prof. Johann Fellner, Vienna University of Technology, Austria
Prof. Dr. Mahmud Ismail; Department of Electrical, Electronic & System Engineering,
University Kebangsaan Malaysia, MALAYSIA
Prof. Hiromi Homma; Toyohashi University of Technology, Japan
Dr. Izziah, M.Sc; Syiah Kuala University - Indonesia

EDITOR

Dr. Nasrul Arahman, ST., MT.

CONFERENCE PROGRAM SCHEDULE

International Conference of Engineering and Science for Research and Development

(ICESRED)

Banda Aceh

October 25-26, 2016

Day 1 (Tuesday), October 25, 2016.

Room ; Hermes Main Hall

8.00-8.30	Registration	
8.30-8.35	Opening Ceremony	MC: Miftahul Jannah, ST, M.Sc
8.35-8.50	Receiting Al-quran , Shalawat Badar, Do'a
8.50-9.00	Singing the National Anthem of Indonesia (Indonesia Raya)	JCOUZY Choir
9.00-9.15	Traditional Dance Performance (Ranup Lampuan)	Sanggar Putro Cut Chemical Engineering, Eng, Faculty of Syiah Kuala University Dr. Edi Munawar, M.Eng
9.15-9.25	Welcoming Remark by Conference Chair of ICESRED	Dr. Ir. Mirza Irwansyah, MBA, MLA
9.25-9.35	Welcoming Remark by Dean of Engineering Faculty	JCOUZY Choir
9.35-9.45	Singing by JCOUZY Choir	Moderator: Dr. Ir. Mirza Irwansyah, M.LA, MBA
9.45-10.00	Coffee Break	
10.00-12.30	Keynote Speeches	
	Prof. Dr. Bambang Brojonegoro, Minister for National Development Planning / Head of National Development Planning Agency of Indonesia	
	Assoc. Prof. Johann Fellner Vienna University of Technology, Austria Plaquette Handover & Photo Session	Committee
12.30-13.30	Break	
13.30-15.30	Parallel Session	Moderator:
15.30-16.00	Break	
16.00-18.00	Parallel Session	Moderator:
18.00-22.00	Opening Gala Dinner - Speech by Dean of Engineering Faculty - Speech by Keynote Speaker - Dance Performance by Putro Cut - Music Performance	Dr. Ir. Mirza Irwansyah, MLA, M.BA Bambang Ratoh Duk Dance Ella Meilianda, Winda and Friends

Day 2 (Wednesday) October 26, 2016

	Invited Speaker	Moderator: Dr. Syifaul Huzni, M.Sc
08.00-10.10	Prof. Dr. Mahmud Ismail (Department of Electrical, Electronic & System Engineering, University Kebangsaan Malaysia, MALAYSIA Prof. Hiromi Homma (Toyohashi University of Technology, Japan)	
	Plaquette Handover & Photo Session	
10.30-11.30	Coffee Break	
11.30-12.30	Parallel Session	PIC SC
12.30-13.30	Break	
13.30-15.30	Parallel Session	PIC SC
15.30-16.00	Break	
16.00-16.30	Closing Ceremony	
	Speech by Chair of International Conference	Dr. Edi Munawar
	Message and impression by conference participants	Presenter
	Announcement of the best paper award	MC
	Closing Speech	Dr. Ir. Mirza Irwansyah, M.LA., M.BA

Day 3 (Thursday) October 28, 2016

City Tour

Wednesday) October 26, 2016

Invited Speaker
Prof. Dr. Mahmud Ismail (Department of
Electrical, Electronic & System Engineering,
University Kebangsaan Malaysia, MALAYSIA
Prof. Hiromi Homma (Toyohashi University of
Technology, Japan)
Plaquette Handover & Photo Session
Coffee Break
Parallel Session
Break
Parallel Session
Break
Closing Ceremony
Speech by Chair of International Conference
Message and impression by conference
participants
Announcement of the best paper award
Closing Speech

Moderator: Dr. Syifaul Huzni, M.Sc

PIC SC

PIC SC

Dr. Edi Munawar
Presenter
MC

Dr. Ir. Mirza Irwansyah, M.LA.,
M.BA

Thursday) October 28, 2016

City Tour

PARALLEL PRESENTATION

I. Tuesday, October 25, 2016

ROOM : Hermes Aceh 1

No	Registration number	Time	Title	Presenter
Moderator : Dr. Renny Anggreini, ST., M. Eng				
1.	18	14.00-14.15	The Role of Rapid Transit Bus, Trans Mebidang in Overcoming the Congestion in Medan	Kaspan Eka Putra and Zainuddin Zainuddin
2.	23/38	14.15-14.30	Standard Evaluation Requirement Reinforcement In Reinforced Concrete Construction Sloof	Mubarak Mubarak, Tripoli Tripoli, Ziana Ziana and Putra Aulia Kesuma
3.	76	14.30-14.45	Reliability Evaluation of Structural Columns that affected by Tsunami In Mina Building Hajj Dormitory Banda Aceh	Samsunan, Muhammad Ikhsan
4.	78	14.45-15.00	Surface Roughness Analysis in Machining of TiC Reinforced Aluminium LM6	Muhammad Yusuf
5.	33	15.00-15.15	Modulos resilient analysis of flexible pavement AC-WC and AC-BC using asphalt penetration 60/70 from Marshall testing results	Tasim Tasman
6.	34	15.15-15.30	The Tensile Behaviour of Concrete with Natural Fiber from Sugar Palm Tree	Ade Wahyuni
7.	59	15.30-15.45	Modeling of Ecologic Urban Green Structure in System Dynamics	Mirza Fuady
		15.45-16.15	Coffee Break and Praying	
Moderator : Dr. Cut Dewi, ST, M.Sc				
8	67	16.15-16.30	The Twentieth Century Architecture of Banda Aceh: Researching Identity and strengthening Colonial Authority	Izziah
9	1	16.30-16.45	Integrating Multicriteria Decision Aid method and GIS Approach for Determining Anaerobic Digester Location in Rural Area	Christia Meldiana, Istiq Dhany Nurfitriya and Kartika Eka Sari

No	Register Number	Time	Title	Presenter
			(Karah Cake) Mechanization Tool Makers On Cake	
39	69	12.15-12.30	Design and Realization Gas Control System in Closed Room Based on Fuzzy Logic	Dianovita, Muhammad Daud, Ezwarsyah
		12.30-14.00	Lunch Break and Praying	
Moderator : Dr. Ashfa, ST., MT.				
40	54	14.00-14.15	Analysis of Conduits against Flood Inundation Using EPA SWMM Model in Surabaya Village Bengkulu City	Muhammad Fauzi, Muhammad Ridwan Sami, Besperi
41	17	14.15-14.30	Estimation Water Profile Of River Flood Discharge Using Hec-Ras (Case Study: Manjuto River, Bengkulu Province, Indonesia)	Gusta Gunawan, Besperi, Alex Surapati, Lidia Agustin
42	60	14.30-14.45	The Needs of Public Green Structure in the City of Banda Aceh	Mirza Fuady
43	70	14.45-15.00	Effectiveness of Tsunami Evacuation Building as The Tsunami Disaster Mitigation Efforts in Banda Aceh	Muhammad Haiqal, Arif Kusumawanto, Soeleman Saragih
44	65	15.00-15.15	Economic Feasibility of Krueng Mane - Buket Rata Road Development Project on Agricultural and Livestock Farming Production	Renni Anggraini ¹ , Sofyan M.Saleh ² , Amirullah ³
		15.15-16.00	Closing Ceremony	PIC

IV. Wednesday, October 26, 2016

ROOM : Hermes Aceh 2

No	Register Number	Time	Title	Presenter
Moderator : Dr. Fitri Arnia, ST., M.Eng				
45.		09.00-09.30	Invited Speech 5G Ultra-dense Femtocell Networks Access: Issues and Challenges	Prof. Dr. Mahmod Ismail Department of Electrical, Electronic & System Engineering, University Kebangsaan Malaysia, MALAYSIA

Register Number	Time	Title	Presenter
46	09.30-09.45	The Power Consumption of Paddlewheel Aerator with Movable Blades	Samsul Bahri, Radite Praeko Agus Setiawan, Wawan Hermawan and Muhammad Zairin Junior
13/35	09.45-10.00	Numerical Study of Tsunami Hazard In West Sumatra Island Sea	Noverina Alfiany and Masaji Watanabe
47	10.00-10.15	Design of Interaction Model for Interactive E-Book	Ratna Wardani, Lukito Edi Nugroho and Umi Rochayati
74	10.15-10.30	Switching Angles Optimization of Cascaded Multilevel Inverter with Newton-Raphson Method	Krismadinata, Syahril, Irma Husnaini, Asnil
Moderator : Dr Ir Mohd Iqbal MT			
72	10.30-10.45	Determined Soil Characteristic and Its Relationship with Earthquake Intensity	Rusnardi Rahmat Putra, Syahril
11	10.45-11.00	Leachate Migration Delineation using Resistivity Method at Gampong Jawa Landfill, Banda Aceh	Abdul Razaq, Rahmat Syukran, Ando Bayu Cahyadi Hutapea, Yulinar Fajrina and Ulfah Kurnia
45	11.00-11.45	Stress Distribution Analysis Of Hip Stem Prosthesis For Bowing And Kneeling Position Using Finite Element Method	Syifaul Huzni, Rizki Syahputra, Syarizal Fonna, Sulaiman Thalib, Muhammad Ridha and A.K Ariffin
30	11.45-12.00	Development of PC-Based FMCW Radar for Ranging Application	Karlisa Priandana, Yanuar Prabowo, Moh. Amanta K. S. Lubis, Fitri Yuli Zulkifli and Eko Tjipto Rahardjo
31	12.00-12.15	Online Feature Extraction Technique for Optical Character Recognition System	Khairun Saddami, Khairul Munadi and Fitri Arnia
75	12.15-12.30	The Effect Of Length Variation Of Pegs On The Flexural Strength Of Laminated Bamboo Beam (Dendrocalamus Asper)	Zulmahdi Darwis, Soelarso, Ipick Setiawan
	12.30-14.00	Lunch Break and Praying	
Moderator : Dr. Cut Dewi, ST., M.Sc			
79	14.00-14.15	Characteristic Of Hot Spring Outflow In Geothermal Field Of Ie-Seu'um, Seulawah Agam, Aceh - Indonesia Using Induced Polarization Method	Marwan, Zul Fadhli, Asrillah, Muhammad Syukri, Rosli Saad, Renaldy
77	14.15-14.30	Circular Patch Microstrip Antenna Design for Wideband Communication	Ernita Dewi Meutia, Rizal Munadi, M. Nurdillah Simatupang

No	Register Number	Time	Title	Presenter
58.	28	14.30-14.45	Factors Affecting the Willingness of Community in Application of Green Infrastructure Component	Sri Maryati, An Nisaa' Siti Humaira and Muhfidlatul Qira'ati
59	27	14.45-15.00	Spatial Variation of Water Supply Provision in Bandung Metropolitan Area	Sri Maryati and An Nisaa' Siti Humaira
60	20	15.00-15.15	Total Quality Management Application on Productivity of Labor	Ikhsan Siregar and Abdillah Arif Nasution
		15.15-16.00	Closing Ceremony	PIC

Determined Soil Characteristic and Its Relationship with Earthquake Intensity

Rusnardi Rahmat Putra¹, Syahril²

¹Department of Civil Engineering Department, Faculty of Engineering, Universitas Negeri Padang

²Department of Mechanical Engineering, Faculty of Engineering, Universitas Negeri Padang

Abstract

Several powerful earthquakes have struck Padang during recent years, one of the largest of which was an M 7.6 event that occurred on September 30, 2009 and caused more than 1000 casualties. Following the event, we conducted a questionnaire survey to estimate the shaking intensity distribution during the earthquake. About 500 residents of Padang were interviewed. The residents received explanations for each item on the questionnaire from the interviewers, and answers were filled in directly on the answer sheets. From this survey we produced a map of the shaking intensity distribution in Padang. In addition to the questionnaire survey, we performed single observations of microtremors at 110 sites in Padang. The results enabled us to estimate the site-dependent amplification characteristics of earthquake ground-motion. We also conducted a 12-site microtremor array investigation to gain a representative determination of the soil condition of subsurface structures in Padang. From the dispersion curve of array observations, the central business district of Padang corresponds to relatively soft soil condition with V_{S30} less than 400 m/s, the predominant periods due to horizontal vertical ratios (HVSRS) are in the range of 2.0 to 4.0 s, and the seismic intensity obtained is upper 5 (5+) in the JMA_i scale. By making these observations, we can obtain a relationship between soil types, predominant periods and seismic intensities.

Keywords: Peak Ground Acceleration, Seismic Intensity of the Japan Meteorology Agency, Padang Earthquake, Microtremor Observations.

INTRODUCTION

Seismic intensity is one of the simplest and most important parameters for describing the degree of ground shaking during an earthquake. Sometimes it has a strong correlation with the human response to ground shaking, observations of damage, and earthquake effect. In this study, we adopt the seismic intensity scale of the Japan Meteorology Agency (JMA) scale, an instrumental seismic intensity that was first adopted in Japan after the 1995 Kobe earthquake. Its scale runs from 0 to 7, with ten classes including lower 5, upper 5, lower 6 and upper 6. We propose the use of the instrumental IJMA to make initial and fast estimations of damage following a seismic event. The city of Padang, located on the west coast of Sumatra in western Indonesia, lies close to the Sumatran subduction zone that is formed by the subduction of the Indo-Australian Plate beneath the Eurasian Plate. Relative motion of the plates occurs at a rate of about 50 to 70 mm/year and this is the main source of subduction-related seismicity in the area (Prawirodirjo et al, 2000). Based on our catalog, seven giant earthquakes have occurred in this region since records began: 1779 (Mw 8.4), 1833 (Mw 9.2), 1861 (Mw 8.3), 2004 (Mw 9.2), 2007 (Mw 7.9 and 8.4) and 2009 (Mw 7.6). The hypocenter of the Padang earthquake that occurred on September 30, 2009 was located in the ocean slab of the Indo-Australian Plate at -0.81°S , 99.65°E and at a depth of 80 km. It produced a high degree of shaking and the tremor was felt in the Indonesian capital, Jakarta, about 923 km from the epicenter. The tremors also were felt in neighboring countries such as Malaysia and Singapore (Megawati et al, 2010). The earthquake caused landslides and collateral debris flows in the hills surrounding Lake Maninjau. A major landslide in Gunung Nan Tigo, Padang Pariaman completely destroyed some villages and forced road closures.

This 1900-km-long active strike-slip fault zone that runs along the backbone of Sumatra poses seismic and fault hazards to a dense population distributed on and around the fault zones (Natawidjaja, 2007). The Sumatran Fault is highly segmented. It consists of 20 major geometrically defined segments and the slip rate along the fault increase to the northwest, from about 5 mm/yr. This fault also has generated large destructive earthquakes, e.g., 1892 (Mw 7.1), 1943 (Mw 7.6) and 2007 (Mw 6.4). These faults are capable of generating strong ground motion in the future that would greatly affect vulnerable structures. According to our catalogs, the Sumatran Fault produces a very high annual rate of earthquakes, many of which occur in the shallow region under the island of Sumatra (Fig. 1).

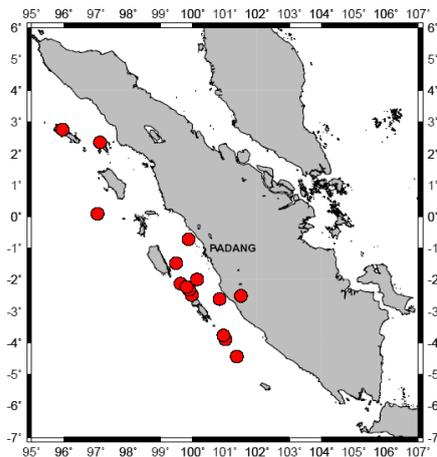


Fig.1 Seismicity of Sumatra Island from 2005 to 2010, Mw>6.5, <100km depth of hypocenter, and Padang City.

Regional Geology and Recent Earthquake

The city of Padang, with a population of 856,814 people as of 2008, is the capital of West Sumatra province. The location of the city center is at 100.38°E , 0.95°S . The main part of Padang is situated on an alluvial plain between the Indian Ocean and the mountains. For the most part, the countainous area is formed of Tertiary sedimentary rocks with outcrops of metamorphic rocks seen in some places. The alluvial plain spreads along the base of the mountains and is roughly 10 km wide in the east-west direction and 20 km wide in the north-south direction.

The topography of the Padang region (**Fig.4(a)**) is very similar to the tsunami-damaged area of Miyagi Prefecture in Japan, that was inundated by as much as 4-5 km from the coast after the March 11, 2011 Mw 9.0 Tohoku earthquake off the east coast of Honshu. In Padang, about 600,000 people live in the coastal area (covering about 60 km^2). The population density is very high, about 8500 people/ km^2 . The city is located on the coast of the Indian Ocean between the Sumatran Fault and the Sunda Trench Fault. Both faults are active

with slip rate ranging from 10 to 27 mm/year [3]. According to our catalog, 2995 events with a magnitude greater than 4 occurred in this region from AD 1779 to 2010. The seven giant earthquakes mentioned previously have all been strongly felt here. For example, the source of the 2009 Padang earthquake was located in the ocean slab of the Indo-Australian Plate. It produced extensive shaking and severe damage to houses and buildings in Padang and Padang Pariaman, because its epicenter was about 60 km offshore from Padang (**Fig. 2(a)**). As the Padang earthquake was an intra-slab earthquake at intermediate depth with a comparable magnitude, the event did not generate a tsunami of significance (EERI 2009). Due to this earthquake, 1117 people were reported killed, 1214 severely injured, 1688 slightly injured, and 3 were left missing in West Sumatra. The earthquake also destroyed many houses, buildings and infrastructure (heavily damaged houses numbered 114,797, with 67,198 moderately damaged and 67,837 slightly damaged). In Padang, 5458 buildings sustained damage (BNPB 2009). This event occurred at the end of the working day, just 15 minutes after offices and schools closed; if it had struck earlier, the number of casualties would definitely have been higher as a result of building collapses. Several hours after Padang earthquake, 1st October 2009, Sumatran fault line generated Mw7.1 and 10km depth. Due to this earthquake destroyed many houses and building (heavily damaged houses numbered 600, with 550 moderately damaged). **Fig.2(a)** shows Padang earthquake and Kurinci earthquake. Since Padang has high potential to great earthquake shaking in near future with great acceleration too compare with previous earthquake in 2009 (Rusnardi et al, 2012). With great potential shaking occur in Padang for several return period of earthquake events, Padang has highest vulnerability to non engineered structure in Indonesia (Rusnardi et al, 2014). Based on observation in Palu city, Palu its self has the same soil characteristic as Padang city (Rusnardi, 2016).

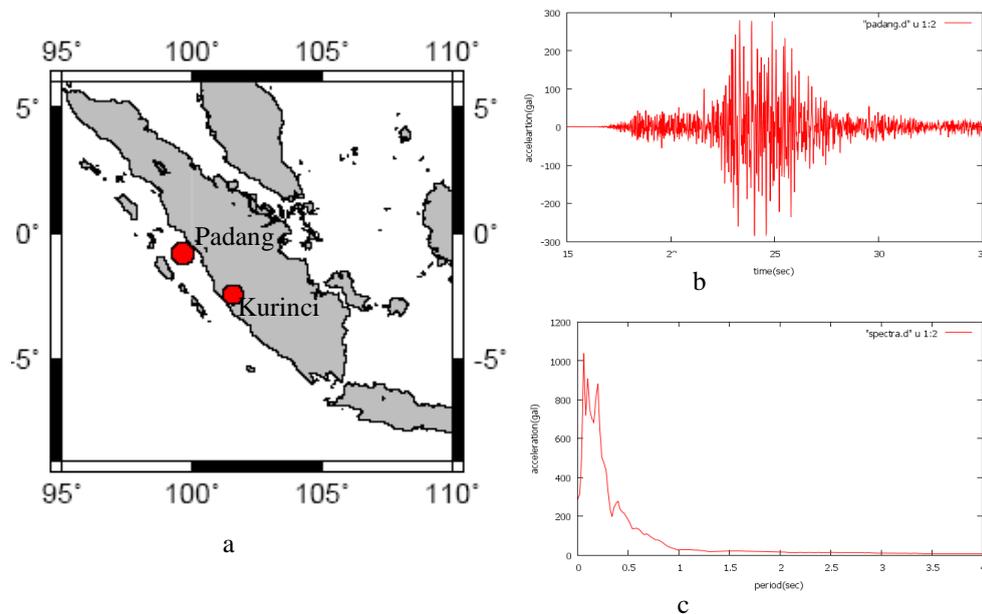


Fig.2 Seismicity and time series. (a) two giant earthquake in Padang Mw7.6 and Kurinci Mw7.1, (b) time series of Padang earthquake, (c) response spectra due to Padang earthquake.

There are four accelerometers in Padang. Three were donated by Engineers Without Borders Japan (EWBJ) and installed in 2008, and the other was installed by the Indonesian Government's Bureau of Meteorology, Climatology and Geophysics (BMKG). However, only one ground motion record is available for the Padang earthquake. Due to an electric power cut during the earthquake, only the BMKG device recorded the time history of the earthquake. The observed record shows about 20 s of strong shaking with a peak ground acceleration (PGA) of 0.3 g and a predominant period of 0.5 s (**Fig. 2(b)**). Response spectra at low period is greater than Indonesia code for rock condition (0.83g) (**Fig.2b**). The location of this station is a mountainous suburb about 12 km in from the coast. The subsurface condition at this station is rocky; the average shear wave velocity for the upper 30 m of the subsurface here, V_{s30} , is 1200 m/s (Rusnardi et al, 2010).

The paucity of measured ground motion information for this earthquake results in a need for transforming observed data (seismic intensity) into parameters that are more useful for engineering purpose (e.g., engineering ground-motion measures) (Tselentis et al 2007). From seismic intensity, we can evaluate historical earthquakes, assess seismic hazard and damage, correlate different intensity scales, and rapidly assess the severity of ground

shaking (Wald, D.J et al,1999). In additional, we performed a 12-site microtremor array observations to determine the shear velocity of subsurface structures at several districts in Padang. From these observations, we obtained relationship between soil types, predominant period and seismic intensity.

DAMAGE FROM THE 2009 PADANG EARTHQUAKE

The city of Padang covers an area of about 695 km² and is divided into 11 districts: B. T. Kabung, K. Tengah, Kuranji, L. Begalung, L. Kilangan, Nanggalo, P. Barat, P. Selatan, P. Timur, P. Utara, and Pauh. 51.0% of the land is forested, 28.52% is used for farming, 9.54% for housing and 7.1% for rice fields (Pemerintah kota Padang, 2010). The population of more than 857,000 is increasing by 2% per year. The K. Tengah district has the highest population and most extensive area compared with the other districts in the city. The central business area of Padang is close to the coast and consist of several district: P. Barat, P. Utara, P. Selatan and P. Timur, B.T. Kabung, K. Tengah. The downtown area is utilized as a center of political and commercial activities. Although the Padang earthquake affected all districts of the city, the major damage occurred downtown, because about 80% of population lives near the coast. The majority of houses in the city are one- and two-storey non-engineered structures. These structures are typically built of confined masonry, with reinforced-concrete (RC) frames acting as confinement for the brick masonry walls. There are three general categories of houses in Padang: permanent houses (RC), semi-permanent houses (mix of RC and wood) and traditional houses (wood). Unfortunately, no detailed damage statistics are available for each type of building, so we cannot classify the category of the house. This earthquake also affected lifelines in Padang. The strong ground shaking destroyed public water distribution pipes leading to 2,906 reported leakage points in total (Padang spring water agency, 2010). Damage to pipelines forced the cessation of water delivery to consumers for several weeks.

SITE CHARACTERIZATION BY MICROTREMOR OBSERVATION

Single Microtremor Observation

A microtremor is a very small ground motion that can be recorded on the ground surface. It can be produced by a variety of excitations (e.g., wind, traffic, breaking sea waves). A full microtremor record can be described by one vertical and two horizontal components. Our analysis was conducted using the recorded microtremor. First, the horizontal and vertical spectrum ratios (HVSr) were computed for all sites (**Fig. 3**). HVSr (Horizontal-Vertical Spectra Ratio) is consists in estimating the ratio between the Fourier amplitude spectra of the horizontal (H) to vertical (V) components of ambient noise vibrations recorded at one single station.

The peak period of the HVSr is known to correspond to the resonant period of the site. This method postulates the shape of the Fourier spectrum . Equation. (1) shows the method used to calculate HVSr using the observed records.

$$HVSr = \sqrt{\frac{F_{NSi}(\omega)^2 + F_{FWi}(\omega)^2}{F_{UDi}(\omega)^2}} \quad (1)$$

where $F_{NSi}(\omega)$ and $F_{UDi}(\omega)$ denote the Fourier amplitude of the NS, EW and UD components of each interval, respectively, and ω is the frequency.

We performed 110 single site surveys that sampled every district of the city of Padang. These observations were carried out in November 2008, September, November, and December 2009 and January 2010. The locations of observations are plotted in **Fig.3**. Microtremor was measured using a GPL- 6A3P sensor. The two horizontal (NS and EW) and the vertical (UD) components were recorded simultaneously for 10 minutes with a 100 Hz sampling frequency. We estimated the distribution of the peak periods of the HVSrs for all sites in Padang using the ordinary kriging technique (**Fig.3**). From single observations, we obtained a predominant period of 2.0 to 4.0 s in the central business district and less than 1.0 s in the mountainous areas. These results indicate an affect related to the thickness of alluvium in the coastal area of Padang city, which decreases in thickness inland.

Microtremor Array Observation

The velocity of surface waves is well known to vary as a function of frequency (or period) due to dispersion. Since dispersion is a function of subsurface structure, the substructure can be estimated from a Rayleigh wave dispersion curve. We carried out microtremor array investigations using 12 sites at several districts in Padang (**Fig.4(a)**). Dispersion curves were calculated using the SPAC method (Aki, K. 1957) to

obtain a velocity structure from the microtremor recordings. An outline of the procedure follows. It is necessary to simultaneously record microtremors with an instrument array of at least three stations. The dispersion of a measured surface wave is a response to the subsurface structure directly below the array, and the estimation of the subsurface structure causing the dispersion is determined by means of inversion of Rayleigh waves. The basic principles of the SPAC method assume that the complex wave motions of microtremors are stochastic processes in time and space. A spatial autocorrelation coefficient for a circular array can then be defined when the waves composing the microtremor (i.e., the surface waves) are dispersive. Hence, the spatial autocorrelation is a function of phase velocity and frequency. Rayleigh wave records were measured for the 12-array observation sites using the SPAC method and inversion analysis was undertaken on the observed dispersion curves to estimate the soil profiles. In the inversion analysis, the Particle Swarm Optimization (PSO) algorithm was adopted to solve the non-linear optimization problem (Kennedy, J, 1995). The basic procedures of PSO are outlined below.

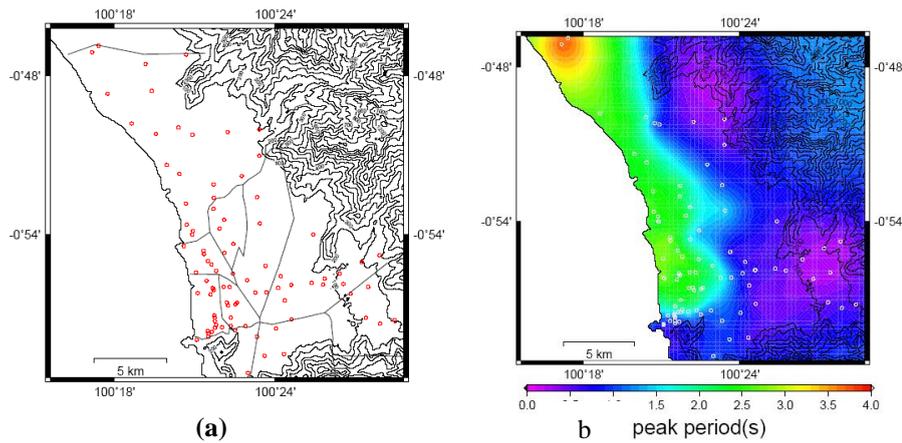


Fig. 3 Observation sites and results of HVSR.(a) Microtremor single observation sites at every district in Padang, (b) Distributed HVSR ratio.

We estimate the subsurface structure of the model by solving a nonlinear minimization problem with the fitness function below.

$$v_{id}^{t+1} = \omega v_{id}^t + c_1 r_1 (p_{id}^t - x_{id}^t) + c_2 r_2 (p_{gd}^t - x_{id}^t) \quad (2)$$

$$x_{id}^{t+1} = x_{id}^t + v_{id}^{t+1} \quad (3)$$

where v_{id}^t is particle velocity of the i^{th} component in dimension d in the interaction, x_{id}^t is the particle position of the i^{th} component in dimension d in interaction, c_1 and c_2 are constant weight factors, p_i is the best position achieved by particle i , p^g is the best position found by the neighbor of particle i , r_1 and r_2 are random factors in the [0,1] interval and ω is the inertia weight. Before performing the inversion analysis, the subsurface structure was assumed to consist of horizontal layers of elastic and homogeneous media above a semi-infinite elastic body. The shear wave velocity and thickness of each layer are the parameters determined by the inversion analysis. The results enable us to determine the condition of shallow subsurface structures (Ono, Y, 2010). The outline of the SPAC method for the phase velocity calculation of Rayleigh waves follows. The spatial autocorrelation function is defined as

$$\phi(r, \theta, \omega) = \overline{u(0,0, \omega, t) * u(r, \theta, \omega, t)} \quad (4)$$

where $\overline{u(t)}$ is the average velocity of the wave in the time domain, and the harmonic waves of frequency ω of the microtremor have the velocity wave forms $u(0,0, \omega, t)$ and $u(r, \theta, \omega, t)$, observed at the center of the array $C(0,0)$ at point $X(r, \theta)$ on the array.

The spatial autocorrelation coefficient ρ is defined as the average of the autocorrelation function ϕ in all directions over the circular array:

$$\rho(r, \omega) = \frac{1}{2\pi\phi(0, \omega)} \int_0^{2\pi} \phi(r, \theta, \omega) d\theta \quad (5)$$

where $\phi(0, \omega)$ is the SPAC function at the center $C(0,0)$ of the circular array. By integration of the (5) we obtain

$$\rho(r, \omega) = Jo\left(\frac{\omega r}{c(\omega)}\right) \quad (6)$$

where $Jo(x)$ is the zero-order Bessel function of the first kind of x , and $c(\omega)$ is the phase velocity at frequency ω . The SPAC coefficient $\rho(r, \omega)$ can be obtained in the frequency domain using the Fourier transform of the observed microtremors.

$$\rho(r, \omega) = \frac{1}{2\pi} \int_0^{2\pi} \frac{Re[S_{CX}(\omega, r, \theta)]}{\sqrt{S_C(\omega) \cdot S_X(\omega, r, \theta)}} d\theta \quad (7)$$

where $S_C(\omega)$ and $S_X(\omega, r, \theta)$ are the power densities of the microtremor at sites C and X respectively, and $S_{CX}(\omega, r, \theta)$ is the cross spectrum between ground motions at these two sites. Thus the SPAC coefficients may be obtained by averaging the normalized coherence function defined as the spectrum between points C and X in the direction θ . From the SPAC coefficient $\rho(r, \omega)$, the phase velocity is calculated for every frequency from the Bessel function argument of (6), and the velocity model can be inverted.

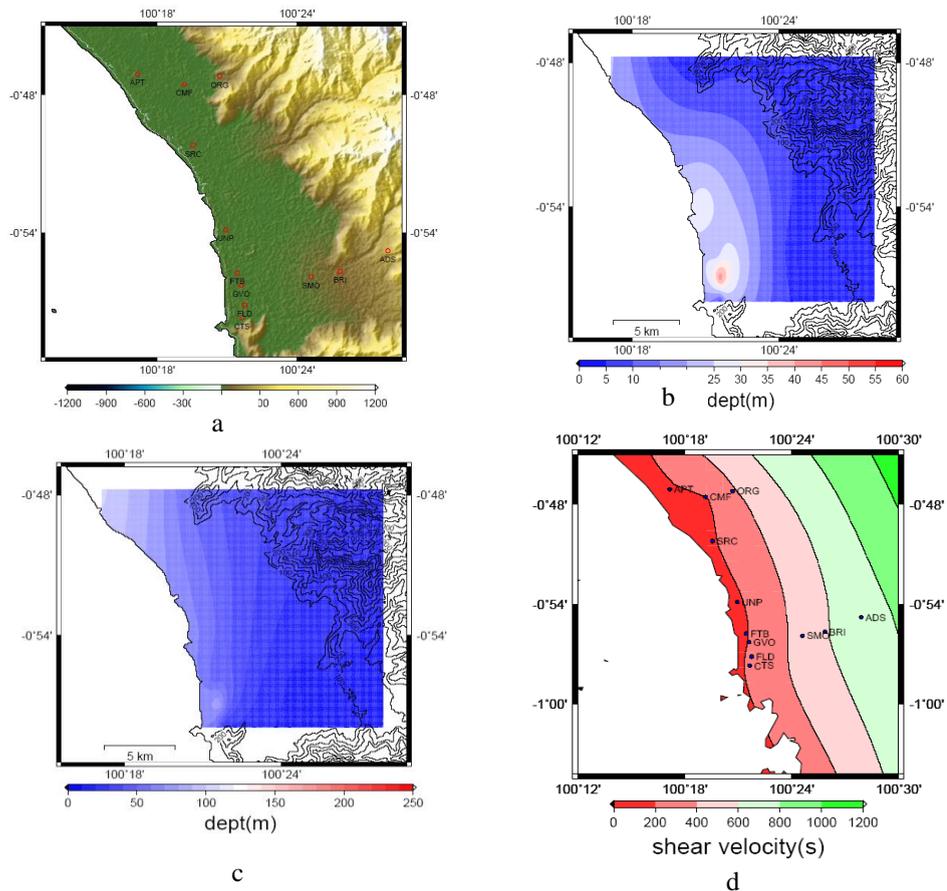


Fig.4 Observation sites, soil profile and distribution of average shear wave velocity, (a) Array observation sites, (b) layer 1 ($V_s < 400\text{m/s}$) and (c) layer 2 ($V_s > 400\text{m/s}$), (d) Distribution of V_{s30} (m/sec).

SHAKING CHARACTERISTICS BY QUESTIONNAIRE SURVEY

Survey Outline

Seismic intensity has been used to quantify the severity of the ground shaking based on the observed or felt effect in a limited area [7]. The method was originally developed by (Otha, Y et al, 1979) and has been widely applied to the development of seismic macro or micro zoning maps in Japan since 1970. The method has also been applied in India and Indonesia by Honda in 2005. It has been useful for estimating seismic shaking in a limited area and for determining intensity distributions over local areas. The original questionnaire sheet was written in Japanese; however, it was translated into Indonesian, for its application to Aceh. The questionnaire has 35 items that cover recognition of shaking, location, shaking duration, possibility of movement, structural damage, swinging of hanging objects, and 27 other items. For the 2009 Padang earthquake, some sentences were modified to make it more relevant for local people while not changing the original topics covered by the questionnaire. People living near the observation points were interviewed using the questionnaire (Fallahi. A, P, et al 2008). The questionnaire survey was conducted from December 24 to 31, 2010, three months after the main shock. The survey was carried out in all districts of Padang by distributing and completing 500 questionnaires through a direct interview process with residents of the city. The interviewers explained each item of the questionnaire to residents, discussed the responses given, and documented the answers on the standard answer sheets.

Estimation of JMA Intensity

The calculation of the seismic intensity determined by the questionnaire is described as:

$$IQ = \frac{1}{N_e} \sum_i^{n_q} \beta_i(m_i) \quad (8)$$

where m_i is chosen by a respondent for the i th question (e.g., $i=12$ and $m_{12}=12$), $\beta_i(m_i)$ is a seismic coefficient, n_q is the number of effective questions of each questionnaire and N_e is the number of responses from all questions. To obtain the JMA intensity (I_{JMA}), the result from (8) is inserted into (9) (Fallahi. A, P, 2005).

$$I_{JMA} = 2.958 \times (IQ - 1.456)^{0.547} \quad (9)$$

Finally, to obtain the JMA intensity (I_{JMA}) for each district, the calculation for each questionnaire is averaged as follows.

$$I_{JMA} = \frac{1}{N} \sum_{i=1}^N I_{JMA(i)} \quad (10)$$

where N is number of questionnaires in one location, and $I_{JMA(i)}$ is the seismic intensity for each questionnaire. The results of the questionnaire survey conducted to estimate the shaking intensity distribution in Padang during the earthquake are summarized in mapped. The results of the questionnaire survey conducted to estimate the shaking intensity distribution in Padang during the earthquake are in mapped. The seismic intensity (I_{JMA}) for the suburbs and downtown were lower 5 (5^-) and upper 5 (5^+) respectively (**Fig.5**). A JMA seismic intensity, I_{JMA} , value of 5^- corresponds to $4.5 < I_{JMA} < 5.0$ and 5^+ equates to $5.0 < I_{JMA} < 5.5$. A value of 5^+ corresponds to very strong ground motion where many people are considerably frightened and find it difficult to move. Non-engineered structures sometimes collapse, walls crack, and gravestones and stone lanterns overturn. A value of 5^- corresponds to strong ground motion. Many people are frightened and feel the need to hold on to something stable. Occasionally, less earthquake-resistant buildings suffer damage to walls, and windows may break and fall. The distribution of various intensity values came from differences in the subsurface structural conditions of each district.

SHAKING CHARACTERISTICS

By comparing the results of the 500 questionnaires of the seismic intensity survey with microtremor observations (110 single-site observations and numerous other 12-site array observations), we found a correlation, in which the subsurface area or site is seen to correspond to the soft soil condition (which we here define as $V_{s30} < 400$ m/s) that exceeds the predominant period. This area corresponds to the thick alluvium in the coastal area of Padang. The thickness of the alluvium gradually decreases in a landward direction from the coast.

As a result, greater seismic intensities are observed in the coastal area and the value decreases from coastal to mountain areas. Important information from respondents' answers were collated. The area was divided in two by considering subsurface structure condition: shear velocities $V_{s30} < 400$ m/s, corresponding to soft soil (area 1), and $V_{s30} > 400$ m/s, corresponding to the engineering bedrock conditions (area 2). The structural type, the age of building, and the number of floors in each of the two areas were found to be generally the same. However, the shaking duration was significantly different.

In area 1, 96% of respondents said that the duration of shaking was longer than 2 minutes, but in area 2, only 39% of respondents felt the duration of shaking to be longer than 2 minutes. These observations support the existence of a thick alluvial layer that caused the prolonged shaking that most people living in the coastal area felt during the earthquake.

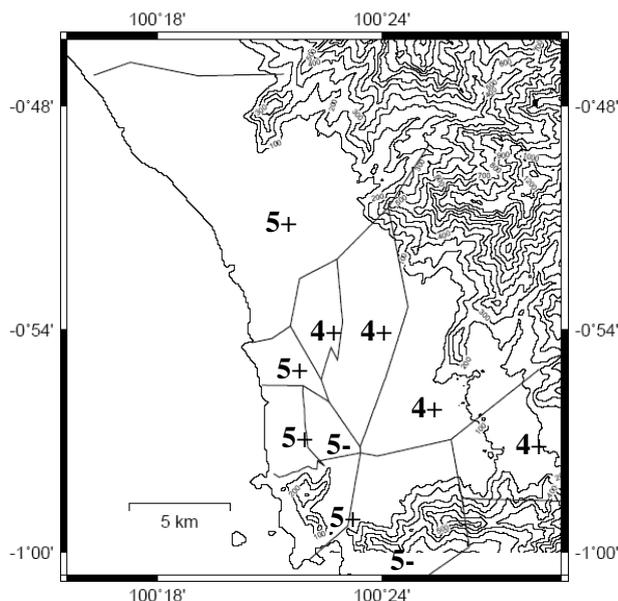


Fig.5 Distribution of seismic intensity at every districts.

CONCLUSIONS

Our survey conducted in Padang consisted of (1) microtremor observations (single and 12-channel arrays) made before and after the earthquake of September 30, 2009, and (2) a questionnaire survey of 500 people in the Padang area. The central part of the city, consisting of the four districts, P. Utara, P. Barat, P. Selatan and P. Timur, experienced greater seismic intensities (5+) compared with other areas (districts) of Padang.

According to microtremor observations, downtown Padang is underlain by soft soil conditions ($V_{s30} < 400$ m/s). Consistent results concerning the soil condition were found based on predominant period observations and the questionnaire survey. In both cases, the coastal area was determined to have a soft soil conditions ($V_{s30} < 400$ m/s), a longer predominant period, and a greater seismic intensity.

Padang has a thick alluvial layer in the coastal area (with a predominant period between 2.0 and 4.2 s) that thins toward the mountains (with a predominant period less than 2.0 s). The subsurface geology also changes slowly from soft soil in the coastal area to rocky conditions in the mountains. The seismic intensity decreases from the coastal area (5+) to mountains (4+).

These results provide critical information for making shaking maps, updating hazard maps, and developing disaster prevention countermeasures in Padang.

REFERENCES

- Aki, K. 1957. *Space and Time Spectra of Stationary Stochastic Waves, with Special Reference to Microtremor*, Bull. Earth. Res. Inst., Vol. 35, No. 3, 415-456.
- BNPB 2009. *Total Damage Report and Verification for West Sumatra due to Padang Earthquake*, BNPB report, 2009
- EERI 2009. *The M_w 7.6 Western Sumatra Earthquake of September 30, 2009*, Special report.
- Fallahi, A, P. Teymourzadeh, M. Miyajima, T. Tobita and R. Alaghebandian (2008). Statistical Study to Determine JMA Earthquake Intensity by Questionnaire Survey in 2003 Bam (Iran) Earthquake, The 14th World conference on earthquake engineering, October 12-17, Beijing, China.
- Keneddy, J. and Eberhart, R. C. (1995), *Particle Swarm Optimization*, Proc. Of IEEE International conference on Neural Networks, Vol.4, pp.1942-1948.
- Megawati and Tso-Chien Pan, *Ground-motion attenuation relationship for the Sumatran megathrust earthquakes*, Earthquake Engng Struct. Dyn. 2010; 39:827–845 Published online 27 October 2009 in Wiley InterScience (www.interscience.wiley.com). DOI: 10.1002/eqe.967.
- Natawidjaja and Wahyu Triyoso 2007. *The Sumatran Fault Zone-from Source to Hazard*, J. of Earthquake and Tsunami, Vol. 1 No. 1, 21-47.
- Ono, Y., Kiyono, J., Rusnardi, P. R. and Noguchi, T. 2010. *Microtremor Observation in Padang City, Indonesia to Estimate Site Amplification of Seismic Ground Motion*, Proc. of International Symposium on a Robust and Resilient Society against Natural Hazards and Environmental Disasters and the third AUN/SEED-Net Regional Conference on Geodisaster Mitigation, pp.386-391.
- Otha, Y., Goto, N., and Ohashi, H., (1979). *A questionnaire Survey for Estimating Seismic Intensity*, full. Fac. Eng., Hokkaido University 92, 241-252 [in Japanese]
- Padang spring water agency, www.pdampadang.co.id
- Pemerintah kota Padang. available at www.Padang.go.id (Padang local government website).
- Prawirodirjo, L., Y. Bock, J.F. 2000, *One Century of Tectonic Deformation along the Sumatran Fault from Triangulation and Global Positioning System Surveys*, J. of Geophysical research, 105, 28, 343-28,363.
- Rusnardi, J. Kiyono, Parajuli, *Seismic Hazard Analysis for Indonesia*, Journal of Natural Disaster Science, Vol. 33, No.3 pp.59-70, June 2012
- Rusnardi Rahmat Putra, Junji Kiyono and Aiko Furukawa, *Vulnerability Assessment of Non Engineered Houses Based on Damage Data of The 2009 Padang Earthquake in Padang City, Indonesia*, Int. J. of GEOMATE, Dec., 2014, Vol. 7, No. 2 (Sl. No. 14), pp. 1076-1083 Geotech., Const. Mat. and Env., ISSN:2186-2982(P), 2186-2990(O), Japan.
- Rusnardi Rahmat Putra, Junji Kiyono, Yasuo Yoshimoto, Yusuke Ono and Syahril, *Determined Soil Characteristic of Palu in Indonesia by Using Microtremor Observation*, Int. J. of GEOMATE, April, 2016, Vol. 10, No. 2 (Sl. No. 20), pp. 1737-1742 Geotech., Const. Mat. and Env., ISSN: 2186-2982(P), 2186-2990(O), Japan
- Tselentis, G-Akis and LaurentiuDanciu. 2008. *Empirical Relationship between Modified Mercalli Intensity and Engineering Ground-motion Parameters in Greece*, bull. Of the Seismological Society of America, vol.98, No.4, pp.1863-1875
- Wald, D.J., V. Quintoriano, T.H. Heaton, H. Kanamori, C.W. Scrivner, and C.B Worden (1999). *TriNet"ShakeMaps": Rapid Generation of Peak Ground Motion and Intensity Maps for Earthquake in southern California*, Earthquake Spectra 15, no. 3, 537-555.

International Conference
on Engineering and Science
for Research and Development (ICESReD)


Theme

“Enhancing the quality of science and engineering through
sustainable research and development to face **ASEAN** Economic Community challenges.”


Hereby acknowledged the participation and contribution of :

Rusnardi Rahmat Putra
as
Presenter

in Banda Aceh - Indonesia, October 25 - 26, 2016

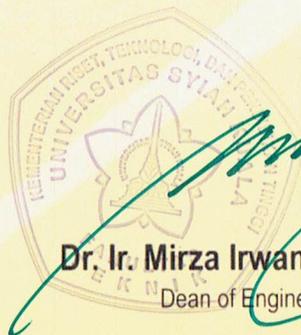

Mirza Irwansyah
Dr. Ir. Mirza Irwansyah, MBA, MLA
Dean of Engineering Faculty

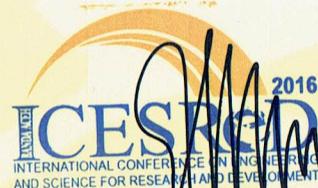

Edi Munawar
Dr. Edi Munawar, S.T., M. Eng
Chair Person of OC



Organized By:



In Collaboration with:



BKS PTN Barat

Sponsored By:



TAMIANG



PT. TAMIANG MULTI TRADA

Supported By:



DISTRIBUTOR OF thermo scientific