

ISBN : 978-602-1178-11-9

Bukittinggi, October 16-17, 2015

PROCEEDINGS

3rd International Conference on Technical and Vocational Education and Training (TVET)

Theme :

**Technical and Vocational Education and
Training for Sustainable Societies**



PENERBITAN & PERCETAKAN UNP PRESS
Jln. Prof Hamka Air Tawar Padang,
Telp. (0751) 7051260, 7055689 Fax (0751) 7055628



Penerbitan & Percetakan

UNP PRESS

UNIVERSITAS NEGERI PADANG



FOREWORDS

This proceeding aims to disseminate valuable ideas and issues based on research or literature review in the field of vocational, technical and engineering studies, which have been presented in 3rd International Conference on TVET. This conference has taken place in Rocky Hotel Bukittinggi West Sumatra, October 16 and 17, 2015.

The theme of Conference focused on the perspective of technical and vocational education and training for sustainable society to face the challenges of 21st century, globalization era, and particularly Asian Economic Community. To overcome the challenges, we need the innovation and change in human resources development. Vocational and technical education and training have essential roles to change the world of education and work in order to establish sustainable society.

Undoubtedly, TVET need to enhance the quality of learning by developing various model of active learning, including learning in the workplace and entrepreneurship. Create innovation and applied engineering as well as information technology. Improvement of management and leadership in TVET Institution, and development of vocational and technical teacher education.

Many ideas and research findings have been shared and discussed in the seminar, more than 70 papers have been collected and selected through scholars, scientists, technologist, and engineers' .as well as teachers, professors, and post graduates students who participated in the conference.

Five keynote speakers have taken apart in the conference, namely Prof. D. Stein Ph.D (Ohio State University-USA), Prof. Yusuke Ono (Tottori University- Japan), and Prof. Nashruddin A. Rahim Ph.D (University of Malaya, Malaysia), and Prof. dr. Ali Gufron Ph.D (Directorate General of Human Resources Development in Higher Education-Indonesia), and Syahril Ph.D (Dean of Faculty Engineering UNP-Padang). They all have a great contribution for the success of the conference.

Finally, thank a million for all participants of the conference who supported the success of 3rd International conference on TVET 2015. and most importantly, our gratitude to all scholars who support and tolerated our mistake during the conference.

Padang, 9 Oktober 2015

Prof. Dr. Nizwardi Jalinus, M.Ed
Chair of Scientific Committee

Table Of Contents

1. PostgreSQL, A Platform for Multiple Sources Data Retrieval, Abdul Yadi	1
2. Information Retrieval System For Research Abstract Using Genetic Algorithm With Jaccard Similarity Factor Elin Haerani, Rubanam	9
3. Addie Model Approach Through The Task Learning Course Of Knowledge In Textile Clothing Depateman Procedures State University Educational Field Dina Ampera.....	16
4. Role Of Information Technology In Education Entrepreneurship In Higher Education, Gunawan Ali, Wulan Andang Purnomo, Wahyu Prima	22
5. Development Media Study Of Natural Culture Minangkabau With Kim Arga Budaya.....	26
6. Improving Quality Community-Based Education Zonny Amanda Putra.....	33
7. Study Of Student Learning Activities On The Subject Of Physics Using Cooperative Learning In State 3 Of Senior High Schools In Bungo Despita, Agus Suparno.....	39
8. The Role Of Locus Control And Learning Styles In The Development Of The Blended Learning Model At UNP Z. Mawardi Effendi, Hansi Effendi, Hastria Effendi	43
9. Learning Outcomes In Vocational Education: A Business Plan Development By Production-Based Learning Model Approach Indrati Kusumaningrum, Hendra Hidayat, Ganefri, Sartika Anori, Mega Silfia Dewy	49
10. Effect Of Social Network Of Adolescent Learning Behaviour Ikhwansyah.....	62
11. Implementation Of Media Interactive Learning Based Wlan Technology (Study At SMK Kampar) Kori Cahyono	68
12. Model Development Work-Based Learning The Course Of Blasting Mining Engineering Department Murad	73
13. Professional Development Of Vocational Teachers Padang Through Advanced Education And Training Ramli.....	82
14. Intelligent System Design "QAIS" Based On Artificial Intelligence At The University Of Muhammadiyah Riau LPMI Resmi Darni	90
15. Geographic Information System Design Shortest Route Location-Based Health Care Android Rice Novita, Welita	95
16. Implementation Of Green Productivity To Increase Productivity And Environmental Performance (Case Study At Sme Bowo) Riko Ervil, Nesky Luciana	101
17. Strategy Implementation Of Supervision In Vocational High School In Bungo, Jambi Sayuti Hamzan, Eman Tu Ferli	105
18. Learning Of Crystal Symmetry By Using 3Ds Max Software Fadhilah	109
19. Computer-Based Learning Media Development In Vocational High School	

Baharuddin, Indra Dauly	115
20. Development Of Blended Learning Model In Human-Computer Interaction At University Faiza Rini, Ari Saiful Arifin Rahman	120
21. Online Tracer Study Of Bung Hatta University Karmila Suryani, Khairudin	127
22. Identifying Initial Damage Of Palm Oil Screw Press Of Drive Shaft Purwo Subekti, Eddy Elfiano, Legisnal Hakim	134
23. Weather Stations Prototype To Flood Detection In High Rainfall Area Yulastri, Era Madona, Lifwarda, Anggara Nasution	139
24. An Evaluation Of Electricity Construction Service Industrial Needs-Based Electrical Installer Sukardi, M. Giatman	143
25. System Management Development Universal Intermediate Education Towards Compulsory 12 Years Muhammad Sahnun, Daswarman	155
26. English Specific Purposes, Elda Martha Suri	164
27. Need Assessment By Nominal Group Technique Student Learning Programme Syafiatun Siregar	167
28. Vocational And Technical Teachers Educations Ungsi, AOM	172
29. Analysis Of Vocational Learning System In Department Of Education Building Technique Kinanti Wijaya, Asri Lubis	175
30. Learning Based On Student Thinking Dedy Irfan	180
31. Teaching And Learning Through The Virtual Laboratory Aswardi	186
32. Reforming Fishery Study Expertise Program Of Vocational High Schools (VHSS) Adapted To New Paradigm Of Fishery Resorces Management Asahan Pasaribu	190
33. Application Information System Rental Facilities At The Universitas Lancang Kuningbased Online Nurliana Nasution, Mhd. Arief Hasan, Yummastian	198
34. An Improving Of The Soft Skills And Hard Skill Abilities For Vocational High Schools Students In Learning Process On Service Production Units Adi Sutopo	202
35. Biometric Application For Eyeiris's detection Based Artificial Neural Network Using Discrete Hopfield Algorithm Dicky Nofriansyah, Haryadi, Amrizal	207
36. The Effect Of Instructional Drill And Practice Method And Low Self-Efficacy Toward Fashion Drawing Achievement At SMK Negeri Medan Farihah	214
37. Study Of Ground Water Contamination By Leachate Around Air Dingin Landfill Padang Yaumal Arbi, Tri Padmi Damanhuri, Idris Maxdoni Kamil	218
38. Service Excellence Competence Enhancement For Students Of Finance And Banking Diploma III Faculty Of Economics Uii To Increase Competitiveness Level To Face Asean Economic Community Aidha Trisanty, Nurfauziah	228
39. Need And Analysis Of Soft Skills For Students Of The Mechanical Engineering Department Of Vocational High School Suryo Hartanto, Syahron Lubis, Fahmi Rizal	234

40. Environment Influence Toward Operational Performance In Handcraft Central Industry Silungkang Village Sawahlunto Rasidah Nasrah	239
41. Optimizing The Personal Website Of The Publication Educator By Applying UML Erdisna, Muhammad Ikhlas	242
42. An Evaluation Study On The Effectiveness Of Evacuation Routes Utilization In The Tsunami Potential Area At Padang City Fitra Rifwan.....	248
43. Needs Analysis Of English For Mechanical Engineering Students Martini	254
44. Characteristics Of The Permeability Coefficient (K) At The Regional Flood Inundation Often In Padang Totoh Andayono, Fitra Rifwan.....	258
45. Pengembangan Model E-Learning Dan E-Assessment Berorientasi Problem Based Learning Pada Mata Pelajaran ‘Memelihara Transmisi’ Pada Kelas XI Kompetensi Keahlian Teknik Kendaraan Ringan-SMK Di Sentra Pendidikan BLPT Padang Wakhinuddin	262
46. Modeling Unified Modeling Language (Uml) For The Implementation Of E-Community Alumni (Case Study In Graduate Program Upi “YPTK” Padang) Febriyanno Suryana, Masriadi, Eryunizon	273
47. Evaluation Program Work Practice Industry (Prakerin) In The Era Centralized Vocational Education In The West Sumatra Using Model CIPPO, Ambiyar	278
48. The Need Analysis For The Design Of The Entrepreneurship Product-Oriented Graphical Design Interactive CD Of The Students Of SMK Of Dharmasraya Regency Kasman Rukun, Asrul Huda, Yeka Hendriyani	286
49. Transient Response Study on Transformer Windings Under Impulse Voltage Stresses Hendri Masdi, Rusnardi Rahmat.....	291
50. Design Of Portal Door In Vehicles Parking System Using Programmable Logic Device (PLD) Technology Muhammad Irmansyah, Era Madona, Amelia Yolanda, Ratna Dewi	296
51. Ground Motion Characteristics In Padang, Indonesia Rusnardi Rahmat, Hendri, Syahr, Henry Yustisia	300



Ground Motion Characteristic in Padang, Indonesia

Rusnardi.R¹, Hendri², Syahr³, Henny Yustisia¹,

¹Civil Engineering Department, Padang State

University, Indonesia

²Electronical Engineering Department, Padang State University, Indonesia

³ Mechanical Engineering Department, Padang State University, Indonesia

□

ABSTRACT: Several powerful earthquakes have struck Padang during recent years, one of the largest of which was an M 7.6 event that occurred on September 30, 2009 and caused more than 1000 casualties. Following the event, we conducted a questionnaire survey to estimate the shaking intensity distribution during the earthquake. About 500 residents of Padang were interviewed. The residents received explanations for each item on the questionnaire from the interviewers, and answers were filled in directly on the answer sheets. From this survey we produced a map of the shaking intensity distribution in Padang. In addition to the questionnaire survey, we performed single observations of microtremors at 110 sites in Padang. The results enabled us to estimate the site-dependent amplification characteristics of earthquake ground-motion. We also conducted a 12-site microtremor array investigation to gain a representative determination of the soil condition of subsurface structures in Padang. From the dispersion curve of array observations, the central business district of Padang corresponds to relatively soft soil condition with V_{S30} less than 400 m/s, the predominant periods due to horizontal vertical ratios (HVSRS) are in the range of 2.0 to 4.0 s, and the seismic intensity obtained is upper 5 (5+) in the I_{JMA} scale. By making these observations, we can obtain a relationship between soil types, predominant periods and seismic intensities.

Keywords: Peak Ground Acceleration, Seismic Intensity of the Japan Meteorology Agency, Padang Earthquake, Microtremor Observations.

I. INTRODUCTION

Seismic intensity is one of the simplest and most important parameters for describing the degree of ground shaking during an earthquake. Sometimes it has a strong correlation with the human response to ground shaking, observations of damage, and earthquake effect. In this study, we adopt the seismic intensity scale of the Japan Meteorology Agency (I_{JMA}) scale, an instrumental seismic intensity that was first adopted in Japan after the 1995 Kobe earthquake. Its scale runs from 0 to 7, with ten classes including lower 5, upper 5, lower 6 and upper 6. We propose the use of the instrumental I_{JMA} to make initial and fast estimations of damage following a seismic event.

□

The city of Padang, located on the west coast of Sumatra in western Indonesia, lies close to the Sumatran subduction zone that is formed by the subduction of the Indo-Australian Plate beneath the Eurasian Plate. Relative motion of the plates occurs at a rate of about 50 to 70 mm/year and this is the main source of subduction-related seismicity in the area [1]. Based on our catalog, seven giant earthquakes have occurred in this

region since records began: 1779 (Mw 8.4), 1833 (Mw 9.2), 1861 (Mw 8.3), 2004 (Mw 9.2), 2007 (Mw 7.9 and 8.4) and

2009 (Mw 7.6). The hypocenter of the Padang earthquake that occurred on September 30, 2009 was located in the ocean slab of the Indo-Australian Plate at -0.81°S , 99.65°E and at a depth of 80 km. It produced a high degree of shaking and the

tremor was felt in the Indonesian capital, Jakarta, about 923 km from the epicenter. The tremors also were felt in neighboring countries such as Malaysia and Singapore [2]. The earthquake caused landslides and collateral debris flows in the hills surrounding Lake Maninjau. A major landslide in Gunung Nan Tigo, Padang Pariaman completely destroyed some villages and forced road closures.

This 1900-km-long active strike-slip fault zone that runs along the backbone of Sumatra poses seismic and fault hazards to a dense population distributed on and around the fault zones [3]. The Sumatran Fault is highly segmented. It consists of 20 major geometrically defined segments and the slip rate along the fault increases to the northwest, from about 5 mm/yr [3]. This fault also has generated large destructive earthquakes, e.g., 1892 (Mw 7.1), 1943 (Mw 7.6) and 2007 (Mw 6.4). These faults are capable of generating strong ground motion in the future that would greatly affect vulnerable structures. According to our catalogs, the Sumatran Fault produces a very high annual rate of earthquakes, many of which occur in the shallow region under the island of Sumatra (**Fig. 1**).

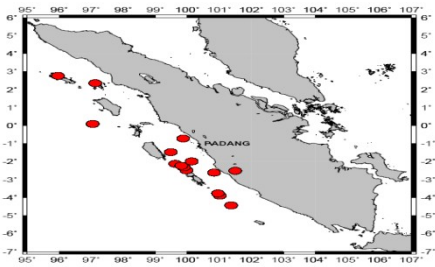


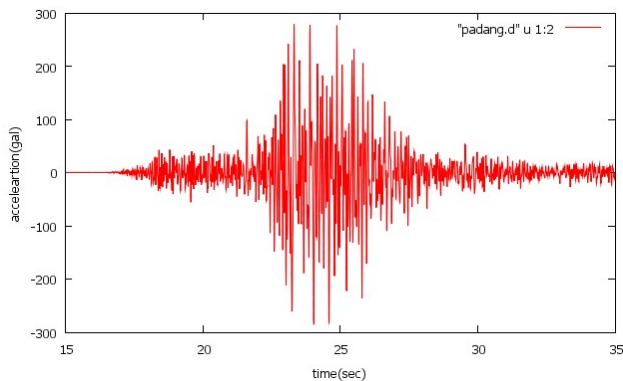


Fig.1 seismicity of sumatra island from 2005 to 2010, $m_w > 6.5$, < 100 km depth of hypocenter, and padang city.

1. REGIONAL GEOLOGY AND RECENT EARTHQUAKES

Kurinci
 Padang

The city of Padang, with a population of 856,814 people as of 2008, is the capital of West Sumatra province. The location of the city center is at 100.38°E , 0.95°S . The main part of Padang is situated on an alluvial plain between the Indian Ocean and the mountains. For the most part, the mountainous area is formed of Tertiary sedimentary rocks with outcrops of metamorphic rocks seen in some places. The alluvial plain spreads along the base of the mountains and is roughly 10 km wide in the east-west direction and 20 km wide in the north-south direction.



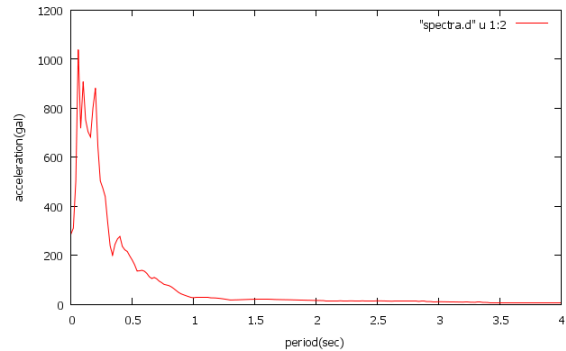
(a)
 Padang

(a)
 (a)

The topography of the Padang region (**Fig.4(a)**) is very similar to the tsunami-damaged area of Miyagi Prefecture in Japan, that was inundated by as much as 4-5 km from the coast after the March 11, 2011 Mw 9.0 Tohoku earthquake off the east coast of Honshu. In Padang, about 600,000 people live in the coastal area (covering about 60 km²). The population density is very high, about 8500 people/km². The city is located on the coast of the Indian Ocean between the Sumatran Fault and the Sunda Trench Fault. Both faults are active with slip rate ranging from 10 to 27 mm/year [3]. According to our catalog, 2995 events with a magnitude greater than 4 occurred in this region from AD 1779 to 2010. The seven giant earthquakes mentioned previously have all been strongly felt here. For is greater than Indonesia code for rock condition (0.83g) (**Fig.2b**). The location of this station is a mountainous suburb about 12 km in from the coast. The subsurface condition at this station is rocky; the average shear wave velocity for the upper 30 m of the subsurface here, V_{s30} , is 1200 m/s [6].

(c)

example, the source of the 2009 Padang earthquake was located in the ocean slab of the Indo-Australian Plate.



It produced extensive shaking and severe damage to houses and buildings in Padang and Padang Pariaman, because its epicenter was about 60 km offshore from Padang (**Fig. 2(a)**). As the Padang earthquake was an intra-slab earthquake at intermediate depth with a comparable magnitude, the event did not generate a tsunami of significance [4]. Due to this earthquake, 1117 people were reported killed, 1214 severely injured, 1688 slightly injured, and 3 were left missing in West Sumatra. The earthquake also destroyed many houses, buildings and infrastructure (heavily damaged houses numbered 114,797, with 67,198 moderately damaged and 67,837 slightly damaged). In Padang, 5458 buildings sustained damage [5]. This event occurred at the end of the working day, just 15 minutes after offices and schools closed; if it had struck earlier, the number of casualties would definitely have been higher as a result of building collapses. Several hours after Padang earthquake, 1st October 2009, Sumatran fault line generated Mw 7.1 and 10 km depth. Due to this earthquake destroyed many houses and building (heavily damaged houses numbered 600, with 550 moderately damaged). **Fig.2(a)** shows Padang earthquake and Kurinci earthquake.

(b)

There are four accelerometers in Padang. Three were donated by Engineers Without Borders Japan (EWBJ) and installed in 2008, and the other was installed by the Indonesian Government's Bureau of Meteorology, Climatology and Geophysics (BMKG). However, only one ground motion record is available for the Padang earthquake. Due to an electric power cut during the earthquake, only the BMKG device recorded the time history of the earthquake. The observed record shows about 20 s of strong shaking with a peak ground acceleration (PGA) of 0.3 g and a predominant period of 0.5 s (**Fig. 2(b)**).

Fig.2 Seismicity and time series. (a) two giant earthquake in Padang Mw 7.6 and Kurinci Mw 7.1, (b) time series of Padang earthquake, (c) response spectra due to Padang earthquake.

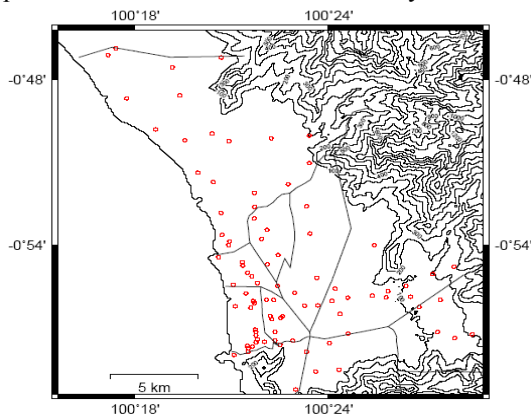
The paucity of measured ground motion information for this earthquake results in a need for transforming observed data (seismic intensity) into parameters that are



more useful for engineering purpose (e.g., engineering ground-motion measures)[7]. From seismic intensity, we can evaluate historical earthquakes, assess seismic hazard and damage, correlate different intensity scales, and rapidly assess the severity of ground shaking [8]. In addition, we performed a 12-site microtremor array observations to determine the shear velocity of subsurface structures at several districts in Padang. From these observations, we obtained relationship between soil types, predominant period and seismic intensity.

2. DAMAGE FROM THE 2009 PADANG EARTHQUAKE

The city of Padang covers an area of about 695 km² and is divided into 11 districts: B. T. Kabung, K. Tengah, Kuranji, L. Begalung, L. Kilangan, Nanggalo, P. Barat, P. Selatan, P. Timur, P. Utara, and Pauh. 51.0% of the land is forested, 28.52% is used for farming, 9.54% for housing and 7.1% for rice fields [9]. The population of more than 857,000 is increasing by 2% per year. The K. Tengah district has the highest population and most extensive area compared with the other districts in the city.



The central business area of Padang is close to the coast and consists of several districts: P. Barat, P. Utara, P. Selatan and P. Timur, B.T. Kabung, K. Tengah. The downtown area is utilized as a center of political and commercial activities. Although the Padang earthquake affected all districts of the city, the major damage occurred downtown, because about 80% of population lives near the coast.

The majority of houses in the city are one- and two-storey non-engineered structures. These structures are typically built of confined masonry, with reinforced-concrete (RC) frames acting as confinement for the brick masonry walls. There are three general categories of houses in Padang: permanent houses (RC), semi-permanent houses (mix of RC and wood) and traditional houses (wood). Unfortunately, no detailed damage statistics are available for each type of building, so we cannot classify the category of the house.

This earthquake also affected lifelines in Padang. The strong ground shaking destroyed public water distribution pipes leading to 2,906 reported leakage points in total

[10]. Damage to pipelines forced the cessation of water delivery to consumers for several weeks.

3. SITE CHARACTERIZATION BY MICROTREMOR OBSERVATION

4.1 SINGLE OBSERVATIONS

A microtremor is a very small ground motion that can be recorded on the ground surface. It can be produced by a variety of excitations (e.g., wind, traffic, breaking sea waves). A full microtremor record can be described by one vertical and two horizontal components. Our analysis was conducted using the recorded microtremor. First, the horizontal and vertical spectrum ratios (HVSr) were computed for all sites (**Fig. 3**). HVSr (Horizontal-Vertical Spectra Ratio) consists in estimating the ratio between the Fourier amplitude spectra of the horizontal (H) to vertical (V) components of ambient noise vibrations recorded at one single station.

The peak period of the HVSr is known to correspond to the resonant period of the site. This method postulates the shape of the Fourier spectrum [11].

Equation (1) shows the method used to calculate HVSr using the observed records.

$$HVSr = \frac{FNSi\omega^2 + FFWi\omega^2}{FUDi\omega^2}$$

(1)

where $FNSi(\omega)$ and $FUDi(\omega)$ denote the Fourier amplitude of the NS, EW and UD components of each interval, respectively, and ω is the frequency.

We performed 110 single site surveys that sampled every district of the city of Padang. These observations were carried out in November 2008, September, November, and December 2009 and January 2010. The locations of



observations are plotted in **Fig.3**. Microtremor was measured using a GPL- 6A3P sensor. The two horizontal (NS and EW)and the vertical (UD) components were recorded simultaneously for 10 minutes with a 100 Hz sampling frequency.

We estimated the distribution of the peak periods of the HVSRs for all sites in Padang using the ordinary kriging technique (**Fig.3**). From single observations, we obtained a predominant period of 2.0 to 4.0 s in the central business district and less than 1.0 s in the mountainous areas. These results indicate an affect related to the thickness of alluvium in the coastal area of Padang city, which decreases in thickness inland.

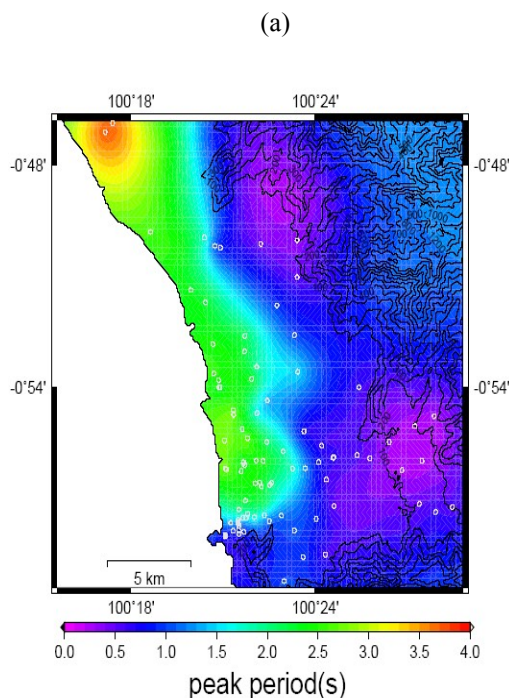


Fig. 3 Observation sites and results of HVSR.(a) Microtremor single observation sites at every district in Padang, (b) Distributed HVSR ratio.

4.2 MICROTREMOR ARRAY OBSERVATIONS

The velocity of surface waves is well known to vary as a function of frequency (or period) due to dispersion. Since dispersion is a function of subsurface structure, the subsurface can be estimated from a Rayleigh wave dispersion curve. We carried out microtremor array investigations using 12 sites at several districts in Padang (**Fig.4(a)**). Dispersion curves were calculated using the SPAC method [12] to obtain a velocity structure from the microtremor recordings. An outline of the procedure follows. It is necessary to simultaneously record microtremors with an instrument array of at least three stations. The dispersion of a measured surface wave is a response to the subsurface structure directly below the array, and the estimation of the subsurface structure

causing the dispersion is determined by means of inversion of Rayleigh waves. The basic principles of the SPAC method assume that the complex wave motions of microtremors are stochastic processes in time and space. A spatial autocorrelation coefficient for a circular array can then be defined when the waves composing the microtremor (i.e., the surface waves) are dispersive. Hence, the spatial autocorrelation is a function of phase velocity and frequency.

Rayleigh wave records were measured for the 12-array observation sites using the SPAC method and inversion analysis was undertaken on the observed dispersion curves to estimate the soil profiles. In the inversion analysis, the Particle Swarm Optimization (PSO) algorithm was adopted to solve the non-linear optimization problem [13]. The basic procedures of PSO are outlined below.

We estimate the subsurface structure of the model by solving a nonlinear minimization problem with the fitness function below.

$$v_{idt+1} = \omega v_{idt} + c_1 r_1 p_{idt} - x_{idt} + c_2 r_2 p_{gdt} - x_{gdt}^2$$

$$x_{idt+1} = x_{idt} + v_{idt+1}$$

(3)

where v_{idt} is particle velocity of the i th component in

dimension d in the interaction, x_{idt} is the particle position

of the i th component in dimension d in interaction, c_1 and

c_2 are constant weight factors, p_{iis} is the best position



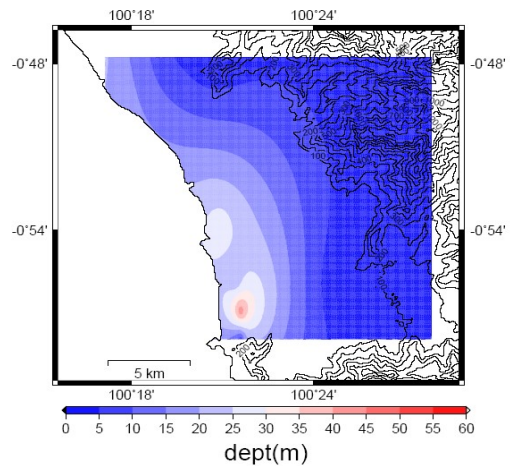
achieved by particle i , p_g is the best position found by the

neighbor of particle i , r_1 and r_2 are random factors in the

$[0,1]$ interval and ω is the inertia weight. Before

performing the inversion analysis, the subsurface structure was assumed to consist of horizontal layers of elastic and homogeneous media above a semi-infinite elastic body. The shear wave velocity and thickness of each layer are the parameters determined by the inversion analysis. The results enable us to determine the condition of shallow subsurface structures [14]. The outline of the SPAC method for the phase velocity calculation of Rayleigh waves follows. The spatial autocorrelation function is defined as

$$\phi(r, \theta, \omega) = \frac{1}{N} \sum_{i=1}^N u_0(0, \omega, t) u_r(\theta, \omega, t) \quad (4)$$



where u_t is the average velocity of the wave in the time

domain, and the harmonic waves of frequency ω of the

microtremor have the velocity wave forms $u_0(0, \omega, t)$ and

$u_r(\theta, \omega, t)$, observed at the center of the array $C(0,0)$ at

point X_r, θ on the array.

The spatial autocorrelation coefficient ρ is defined as the

average of the autocorrelation function in all directions over the circular array:

$$\rho(r, \omega) = \frac{1}{2\pi} \int_0^{2\pi} \phi(0, \omega) \phi(r, \theta, \omega) d\theta \quad (5)$$



where $\phi(0,\omega)$ is the SPAC function at the center $C(0,0)$
 of the circular array. By integration of the (5) we obtain

$$\rho(r,\omega) = J_0(\omega r c \omega) \quad (6)$$

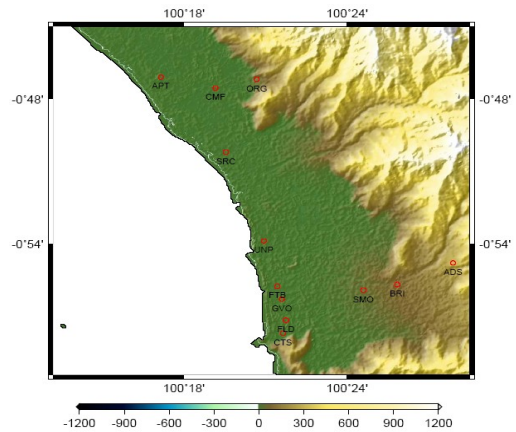
where $J_0(x)$ is the zero-order Bessel function of the first
 kind of x , and $c\omega$ is the phase velocity at frequency ω .

The SPAC coefficient $\rho(r,\omega)$ can be obtained in the
 frequency domain using the Fourier transform of the
 observed microtremors.

$$\rho(r,\omega) = \frac{1}{2\pi} \int_0^{2\pi} \text{Re} [S_C(\omega, r, \theta) S_X(\omega, r, \theta) d\theta]$$

(7)


where $S_C(\omega)$ and $S_X(\omega, r, \theta)$ are the power densities of
 the microtremor at sites C and X respectively, and
 $SCX(\omega, r, \theta)$ is the cross spectrum between ground motions
 at these two sites. Thus the SPAC coefficients may be
 obtained by averaging the normalized coherence function
 defined as the spectrum between points C and X in the



direction θ . From the SPAC coefficient $\rho(r,\omega)$, the phase
 velocity is calculated for every frequency from the Bessel
 function argument of (6), and the velocity model can be
 inverted.

(a)

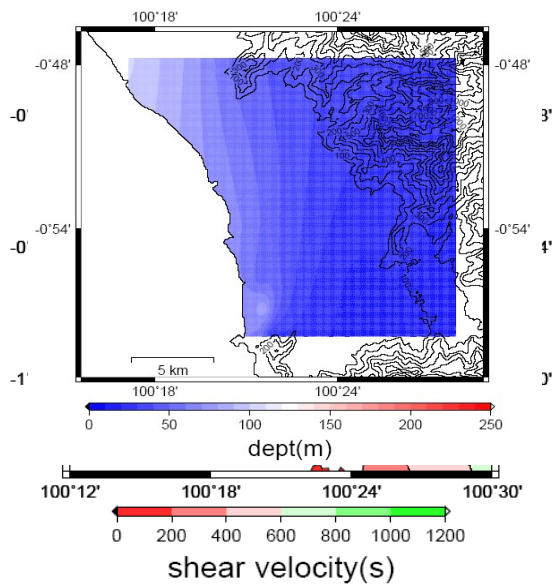Altitude



(b)
 (c)
 (d)
Fig.4 Observation sites, soil profile and distribution of average shear wave velocity, (a) Array observation sites, (b) layer 1 ($V_s < 400\text{m/s}$) and (c) layer 2 ($V_s > 400\text{m/s}$), (d) Distribution of V_{s30} (m/sec).

5 SHAKING CHARACTERISTICS BY QUESTIONNAIRE SURVEY

5.1 Survey Outline

Seismic intensity has been used to quantify the severity of the ground shaking based on the observed or felt effect in a limited area [7]. The method was originally developed by [15] and has been widely applied to the development of seismic macro or micro zoning maps in Japan since 1970. The method has also been applied in India and Indonesia by Honda in 2005. It has been useful for estimating seismic shaking in a limited area and for determining intensity distributions over local areas [7]. The original questionnaire sheet was written in Japanese; however, it was translated into Indonesian, for its application to Aceh. The questionnaire has 35 items that cover recognition of shaking, location, shaking duration, possibility of movement, structural damage, swinging of hanging objects, and 27 other items.

For the 2009 Padang earthquake, some sentences were modified to make it more relevant for local people while not changing the original topics covered by the questionnaire. People living near the observation points were interviewed using the questionnaire [15]. The questionnaire survey was conducted from December 24 to 31, 2010, three months after the main shock. The survey was carried out in all districts of Padang by distributing

and completing 500 questionnaires through a direct interview process with residents of the city. The interviewers explained each item of the questionnaire to residents, discussed the responses given, and documented the answers on the standard answer sheets.

5.2 Estimation of JMA Intensity

The calculation of the seismic intensity determined by the questionnaire is described as:

$$IQ = 1Neinq\beta_i(m_i)$$

(8)

where m_i is chosen by a respondent for the i th question

(e.g., $i=12$ and $m_{12}=12$), β_i is a seismic coefficient, nq

is the number of effective questions of each questionnaire

and Ne is the number of responses from all questions. To

obtain the JMA intensity (IJMA), the result from (8) is

inserted into (9) [16].

$$IJMA = 2.958 \times (IQ - 1.456)^{0.547}$$

(9)



Finally, to obtain the JMA intensity (I_{JMA}) for each

district, the calculation for each questionnaire is averaged as follows.

$$I_{JMA} = \frac{1}{N} \sum_{i=1}^N I_{JMA}(i)$$

(10)

where N is number of questionnaires in one location, and

$I_{JMA}(i)$ is the seismic intensity for each questionnaire.

The results of the questionnaire survey conducted to estimate the shaking intensity distribution in Padang during the earthquake are summarized in mapped. The results of the questionnaire survey conducted to estimate the shaking intensity distribution in Padang during the earthquake are in mapped. The seismic intensity (I_{JMA}) for the suburbs and downtown were lower 5 (5^-) and upper 5 (5^+) respectively (**Fig.5**). A JMA seismic intensity, I_{JMA} , value of 5^- corresponds to $4.5 < I_{JMA} < 5.0$ and 5^+ equates to $5.0 < I_{JMA} < 5.5$. A value of 5^+ corresponds to very strong ground motion where many people are considerably frightened and find it difficult to move. Non-engineered structures sometimes collapse, wall crack, and gravestones and stone lanterns overturn. A value of 5^- corresponds to strong ground motion. Many people are frightened and feel the need to hold on to something stable. Occasionally, less earthquake-resistant buildings suffer damage to walls, and windows may break and fall. The distribution of various intensity values came from differences in the subsurface structural conditions of each district.

5.3 SHAKING CHARACTERISTICS

By comparing the results of the 500 questionnaires of the seismic intensity survey with microtremor observations (110 single-site observations and numerous other 12-site array observations), we found a correlation, in which the subsurface area or site is seen to correspond to the soft soil condition (which we here define as $V_{s30} < 400$ m/s) that exceeds the predominant period. This area corresponds to the thick alluvium in the coastal area of Padang. The

thickness of the alluvium gradually decreases in a landward direction from the coast.

Fig.5 Distribution of seismic intensity at every districts.

As a result, greater seismic intensities are observed in the coastal area and the value decreases from coastal to mountain areas. Important information from respondents' answers were collated. The area was divided in two by considering subsurface structure condition: shear velocities $V_{s30} < 400$ m/s, corresponding to soft soil (area 1), and $V_{s30} > 400$ m/s, corresponding to the engineering bedrock conditions (area 2).

The structural type, the age of building, and the number of floors in each of the two areas were found to be generally the same. However, the shaking duration was significantly different.

In area 1, 96% of respondents said that the duration of shaking was longer than 2 minutes, but in area 2, only 39% of respondents felt the duration of shaking to be longer than 2 minutes. These observations support the existence of a thick alluvial layer that caused the prolonged shaking that most people living in the coastal area felt during the earthquake.

6 CONCLUSIONS

Our survey conducted in Padang consisted of (1) microtremor observations (single and 12-channel arrays) made before and after the earthquake of September 30, 2009, and (2) a questionnaire survey of 500 people in the Padang area. The central part of the city, consisting of the four districts, P. Utara, P. Barat, P. Selatan and P. Timur, experienced greater seismic intensities (5^+) compared with other areas (districts) of Padang.

According to microtremor observations, downtown Padang is underlain by soft soil conditions ($V_{s30} < 400$ m/s). Consistent results concerning the soil condition were found based on predominant period observations and the questionnaire survey. In both cases, the coastal area was determined to have a soft soil conditions ($V_{s30} < 400$ m/s), a longer predominant period, and a greater seismic intensity.

Padang has a thick alluvial layer in the coastal area (with a predominant period between 2.0 and 4.2 s) that thins toward the mountains (with a predominant period less than 2.0 s). The subsurface geology also changes slowly from soft soil in the coastal area to rocky conditions in the mountains. The seismic intensity decreases from the coastal area (5^+) to mountains (4^+).

These results provide critical information for making shaking maps, updating hazard maps, and developing disaster prevention countermeasures in Padang.

7. REFERENCES

[1] Prawirodirjo, L., Y. Bock, J.F. 2000, *One Century of Tectonic Deformation along the Sumatran Fault from*



- Triangulation and Global Positioning System Surveys*, J. of Geophysical research, 105, 28, 343-28,363.
- [3] Natawidjaja and Wahyu Triyoso 2007. *The Sumatran Fault Zone-from Source to Hazard*, J. of Earthquake and Tsunami, Vol. 1 No. 1, 21-47.
- [4] EERI 2009. *The M_w 7.6 Western Sumatra Earthquake of September 30, 2009*, Special report.
- [5] BNPB 2009. *Total Damage Report and Verification for West Sumatra due to Padang Earthquake*, BNPB report, 2009
- [6] Rusnardi, J. Kiyono, Y. Ono. 2010, *Seismic Hazard Analysis for Indonesia*, Proc. of International Symposium on a Robust and Resilient Society against Natural Hazards and Environmental Disasters and the third AUN/SEED-Net Regional Conference on Geodisaster Mitigation, pp.317-325.
- [7] Tselentis. G-Akis and LaurentiuDanciu. 2008. *Empirical Relationship between Modified Mercalli Intensity and Engineering Ground-motion Parameters in Greece*, bull. Of the Seismological Society of America, vol.98, No.4, pp.1863-1875
- [8] Wald, D.J., V. Quintoriano, T.H. Heaton, H. Kanamori, C.W. Scriver, and C.B Worden (1999). *TriNet"ShakeMaps": Rapid Generation of Peak Ground Motion and Intensity Maps for Earthquake in southern California*, Earthquake Spectra 15, no. 3, 537-555.
- [9] Pemerintah kota Padang.available at www.Padang.go.id (Padang local government website).
- [10] Padang spring water agency, www.pdampadang.co.id
- [12] Aki, K. 1957. *Space and Time Spectra of Stationary Stochastic Waves, with Special Reference to Microtremor*, Bull. Earth. Res. Inst., Vol. 35, No. 3, 415-456.
- [13] Keneddy, J. and Eberhart, R. C. (1995), *Particle Swarm Optimization*, Proc. Of IEEE International conference on Neural Networks, Vol.4, pp.1942-1948.
- [14] Ono, Y., Kiyono, J., Rusnardi, P. R. and Noguchi, T. 2010. *Microtremor Observation in Padang City, Indonesia to Estimate Site Amplification of Seismic Ground Motion*, Proc. of International Symposium on a Robust and Resilient Society against Natural Hazards and Environmental Disasters and the third AUN/SEED-Net Regional Conference on Geodisaster Mitigation, pp.386-391.
- [15] Otha, Y., Goto, N., and Ohashi, H., (1979). *A questionnaire Survey for Estimating Seismic Intensity*, full. Fac. Eng., Hokkaido University 92, 241-252 [in Japanese]
- [16] Fallahi, A, P. Teymourzadeh, M. Miyajima, T. Tobita and R. Alaghebandian (2008). *Statistical Study to Determine JMA Earthquake Intensity by Questionnaire Survey in 2003 Bam (Iran) Earthquake*, The 14th World conference on earthquake engineering, October 12-17, Beijing, China.



Certificate

No. 4051/UN35.1.2/AK/2015

This is to certify that

Rusnardi Rahmat Putra. PhD. Eng

has participated as

Presenter

entitled "Ground motion characteristic in Padang, Indonesia"

3rd UNP International Conference on Technical and Vocational Education and Training

Theme : **Technical and Vocational Education and Training for Sustainable Societies**

Bukitinggi, 16-17 October 2015

Organized by :

Faculty of Engineering - Universitas Negeri Padang

Prof. Dr. Nizwardi Jalinus, M.Ed
Chair of Scientific Committee



Drs. Syahril, ST, MSCE., Ph.D
Dean, Faculty of Engineering,
Universitas Negeri Padang



JAM GADANG Bukittinggi



ISBN : 978-602-1178-11-9

PENERBITAN & PERCETAKAN UNP PRESS
Jln. Prof Hamka Air Tawar Padang,
Telp. (0751) 7051260, 7055689 Fax (0751) 7055628



About UNP ICTVET

This International Conference aims to create new ideas and innovation Concerning Education and Training on Vocational and Engineering Studies.

This Conference wishes to share various ideas on the basis of research findings, particularly in themes of:

1. Development of learning Model on TVET
2. Workplace learning and entrepreneurship
3. Innovation on applied engineering and information technology
4. Management and leadership on TVET
5. Vocational and Technical Teachers Education

Digest Submission

Digests must be original material and have not been previously presented or published. All materials should be electronically submitted in DOC/DOCX file through the conference website no later than Sept 15, 2015. Selected papers will be published in International Journal of Geomate with Scopus Indexed, GIF, Google Scholar, EBSCO, and Cengage Learning.

Submission contribution for review may include:

- Regular paper (max 6 pages)
- Short papers (work in progress) (2-4 pages)
- Extended abstract (2 pages)
- Posters (2 pages)

The camera ready paper should be in regular version (max 6 pages). Paper selected for publication in conference supporting journals should be extended to avoid duplication.

All topics are open to academic, research and industry contribution, including policy development, technical report, and research in progress.

Venue

The Hills Bukittinggi Hotel & Convention

Jln. Laras Dt. Bandaro bukittinggi 26115

Phone: +6275235000 fax: +6275223800

Website: www.thehillshotel.com

Registration Fee

International Presenter
75 US\$

Indonesia Presenter
500.000 IDR
350.000 IDR (For Student)

Poster
250.000 IDR

Participant
200.000 IDR
100.000 IDR (For Student)

Method of Payment

Bank Remittance
Internasional Participant/Local Participant
a/n **Rahmadhani**
No Rek: 0186187831
Bank Negara Indonesia (BNI 46 Cabang UNP)

Important Dates

Abstract submission	: July 23, 2015
Acceptance notification	: August 1, 2015
Early bird registration	: August 24, 2015
Full paper submission	: Sept 15, 2015
Final Registration	: Oct 9, 2015
Conference Days	: Oct 16-17, 2015

Contacts

ICTVET Committee, Engineering Faculty
Universitas Negeri Padang
Jln. Prof. Dr. Hamka Air Tawar Padang, 25131
Attn. Krismadinata : +62-82283366554
Rusnardi Rahmat : +62-81364690484
Asrul Huda : +62-813 63 777 678
Rahmadhani: +62-81267 63 280
Selvia Larose +: +62-813 74 906 487
Phone : +62-751-7055644, +62-751-7053 3584
Facsimile : +62-751-7055644



FT-UNP

UNP ICTVET 2015

3rd UNP International Conference on Technical and Vocational Education and Training (TVET)

Bukittinggi, Indonesia
Oct 16-17, 2015

**Technical and Vocational Education and
Training for Sustainable Societies**

CALL FOR PAPERS



E-mail : ic-tvet@unp.ac.id,

ictvetunp@gmail.com

Website : <http://ictvet.unp.ac.id>

Program Committee

Hosting Organisation

Engineering Faculty, Universitas Negeri Padang, Indonesia

Advisory Board

Rector of Universitas Negeri Padang

Steering Committee

Prof. Dr. Nizwardi Jalinus, M.Ed

Universitas Negeri Padang

Prof. Ganefri, Ph.D

Universitas Negeri Padang

Prof. Noor Aisyah Buang

Universitas Kebangsaan Malaysia

Dr. Paryono

SEAMEQ/SEAVOC Brunei Darussalam

Prof. Junji Kiyono

University Kyoto, Japan

Prof. Yusuke Ono

Tottori University, Japan

Prof. Vanapalli

Ottawa University, Canada

Prof. Nasrudin Abd. Rahim

University of Malaya

Prof. Rosli Omar

UTeM Malacca

Prof. Selamat Triono Ahmad, M.Sc., Ph.D

Universitas Negeri Medan

Prof. Dr. Ramlee Mustapa

Universiti Pendidikan Sultan Idris (UPSI) Malaysia

Venue

The Hills Bukittinggi Hotel & Convention

Jln. Laras Dt, Bandaro bukittinggi 26115

Phone: +6275235000 fax:+6275223800

Website: www.thehillshotel.com

Organizing Committee

Prof. Dr. Nizwardi Jalinus, M.Ed

Technical and Scientific Committee

Rusnardi Rahmat Putra, Ph.D

Krismadinata, Ph.D

Dr. Nurhasan Syah Dt. Maruhun, M.Pd

Dr. Ridwan, M.Sc. Ed.

Keynote Speaker

Prof. Dr. M. Nasir

(Ministry of Research, Technology and Higher Education)

Prof. Nasrudin Abd. Rahim

(University of Malaya)

Prof. Junji Kiyono

(University Kyoto, Japan)

Prof. Chih-Tsong Su, Ph.D

Kohsiung University Taiwan

Syahril, Ph.D

(Dean of Engineering Faculty, Universitas Negeri Padang)

Contacts

ICTVET Committee, Engineering Faculty

Universitas Negeri Padang

Jln. Prof. Dr. Hamka Air Tawar Padang, 25131

Attn. Krismadinata : +62-82283366554

Rusnardi Rahmat : +62-81364690484

Asrul Huda : +62-813 63 777 678

Rahmadhani: +62-81267 63 280

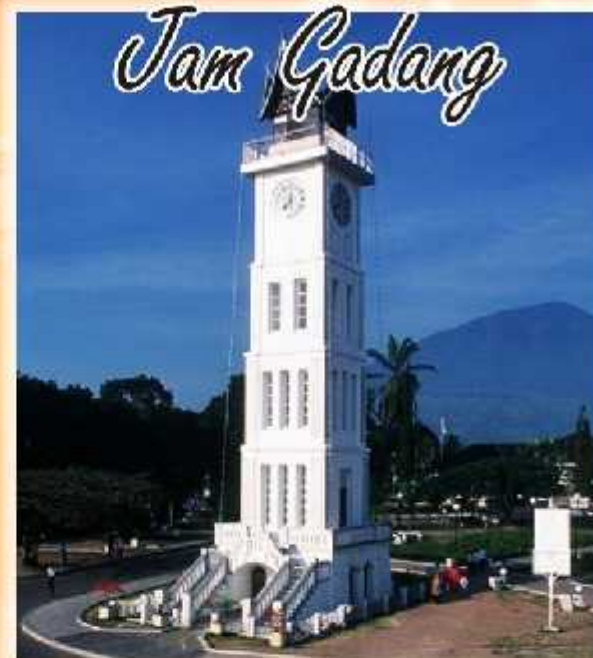
Selvia Larose : +62-813 74 906 487

Phone : +62-751-7055644, +62-751-7053 3584

Facsimile : +62-751-7055644

E-mail : ic-tvet@unp.ac.id, icvetunp@gmail.com

Website : http://icvet.unp.ac.id



Big Ben Tower is the name for the tower clock located in the center of Bukittinggi, West Sumatra, Indonesia. This clock has a tower with a large building on the four sides so-called Clock Tower, designation Minangkabau language meaning "big ben".



Japan holes Bukittinggi (also spelled Japanese hole) is one of the historical attractions in the city of Bukittinggi, West Sumatra, Indonesia. Japan hole is a tunnel (bunker) protection built Japanese occupation army around 1942 for defense purposes.

Sianok Canyon is a steep valley (ravine) located in the border town of Bukittinggi, in the district IV Koto, Agam, West Sumatra. The valley is elongated and meandering as the southern boundary of the city of Koto Gadang to nagari Sianok Anam Tribe, and ends in the district Palupuh. Sianok canyon has a very beautiful view and also became one of the flagship attraction province.



Sumber:
<http://bukittinggiwisata.com>
<http://id.wikipedia.org>