

# Research Journal of Pharmaceutical, Biological and Chemical Sciences

## Design of Photovoltaic Cell with Copper Oxide Electrode by Using Indoor Lights.

Rahadian Zainul\*<sup>1</sup>, Admin Alif<sup>2</sup>, Hermansyah Aziz<sup>3</sup>, Syukri Arief<sup>4</sup>,  
Syukri Dradjad<sup>5</sup>, and Edison Munaf<sup>6</sup>.

<sup>1</sup> Department of Chemistry, Faculty of Mathematics and Natural Sciences, Padang State University, Padang 25163, Indonesia.

<sup>2-6</sup> Department of Chemistry, Faculty of Mathematics and Natural Sciences, Andalas University, Padang 25163, Indonesia.

### ABSTRACT

This research aims to develop PV cell which utilizes natural and artificial incident light coming into indoors. This breakthrough is done to take advantage of the energy wasted from the low lighting in the room. PV cell of indoor lights is developed by modifying the electrode copper-oxide with some design reactor for PV cells to get the best performance. Optimum performance is obtained with a  $V_{max}$  0,988 V and the current (I) maximum 0.635 mA. The measurement results show that cells of  $Cu_2O/Al$  electrode pair better than the cell uses electrodes  $Cu_2O/Cu$ , comparison with the efficiency of 122: 1 in indoor lights and 307: 1 in neon lights.

**Keywords :** Photovoltaic Cell, Copper oxide, Reactor Design, Indoor Lights

*\*Corresponding author*

## INTRODUCTION

In recent years, most of the energy comes from fossil fuels that can cause many problems(1; 2). Among others; First, the air pollution as a result of burning coal and oil that produces carbon dioxide ( $\text{CO}_2$ ). Second, the limited availability and can't renewable. Third, the distribution of the number of countries making the cost of relocation and distribution to is swelling and very expensive(3; 4). Therefore, the necessary research for new energy sources, which are friendly to the environment (ecological), cheap (economical), sustainable for availability and abundant in nature.(5-9)

Solar energy is a clean and abundant energy. Total solar energy that bathes the entire surface of the Earth every year around  $3 \times 10^{24}$  J, or about 10,000 times that of the total world energy consumption per year (4, 10). The density of its power  $1 \text{ kWm}^{-2}$  during sunny days, and the power of solar energy globally approximately 160,000 TW(11). The availability of a large potential for renewable and sustainable energy sources.

During this time, the utilization of the light coming into the room felt very less. This is of concern to us for a cell that is designed to take advantage of the lights, using the technology of photovoltaic cells. The purpose of this research is the PV cell is designed to be able to work on the sunlight coming into the room (indoor lights) and also the light emanating from a light source fluorescent bulbs.

## METHODS AND MATERIALS

### Tools and materials

Tools and materials used in this research is a Multimeter (Heles), Lightmeter, SEM-EDX (Hitachi S-3400N), XRD (PANalytical pw30/40), fluorescent lamps (Philip 10 Watts), paper (separator), carbon paper, Furnace, Analytic Tools, and Scales tools glasses. The materials used in this research is the glass, glue the glass, Plate of Cu and Al, sodium sulfate ( $\text{Na}_2\text{SO}_4$ ) (Merck), gelatin powder, chloroform (Merck) and aquades.

### Experimental Method

#### Manufacture of electrodes the electrode $\text{Cu}_2\text{O}$

$\text{Cu}_2\text{O}$  is made with a plate of Cu on calcination temperature variation of 300, 350, 400, 450 and  $500^\circ\text{C}$ , for 1 hour. Result of a plate of  $\text{Cu}_2\text{O}$  characterized using XRD and SEM-EDX.

#### The manufacture of PV cells

Photovoltaic cells are designed with the variation of the distance and type of electrode used. Cathode ( $\text{Cu}_2\text{O}$ ) and anode (Cu, Al) is limited by the glass (3 mm thick) and a 6 mm, to design 1 and 2. On the design of glass outer wall, 1 at the anode used glass black, whereas in design 2 used carbon paper. In design 3, the cathode and anode are only limited by paper 0.32mm thick membrane and the outer glass anode is limited by carbon paper.

PV cells are made with three designs like the Fig. 1.

#### Sodium Sulfat ( $\text{Na}_2\text{SO}_4$ ) gel electrolyte solution preparation

A total of 14,206 grams of  $\text{Na}_2\text{SO}_4$  dissolved in 400 mL of water and added that as many as 2 grams of powder. The mixture was stirred and heated to boiling until the solution becomes clear. After that, add a few drops of chloroform. In hot conditions the electrolyte solution is poured into the PV cell.

#### Current and voltage PV Cell measurements

Each PV cell that is filled with sodium sulfate, and then irradiated with sunlight coming into the room and fluorescent lights bulbs. Current and voltage of each cell was measured using multimeter.

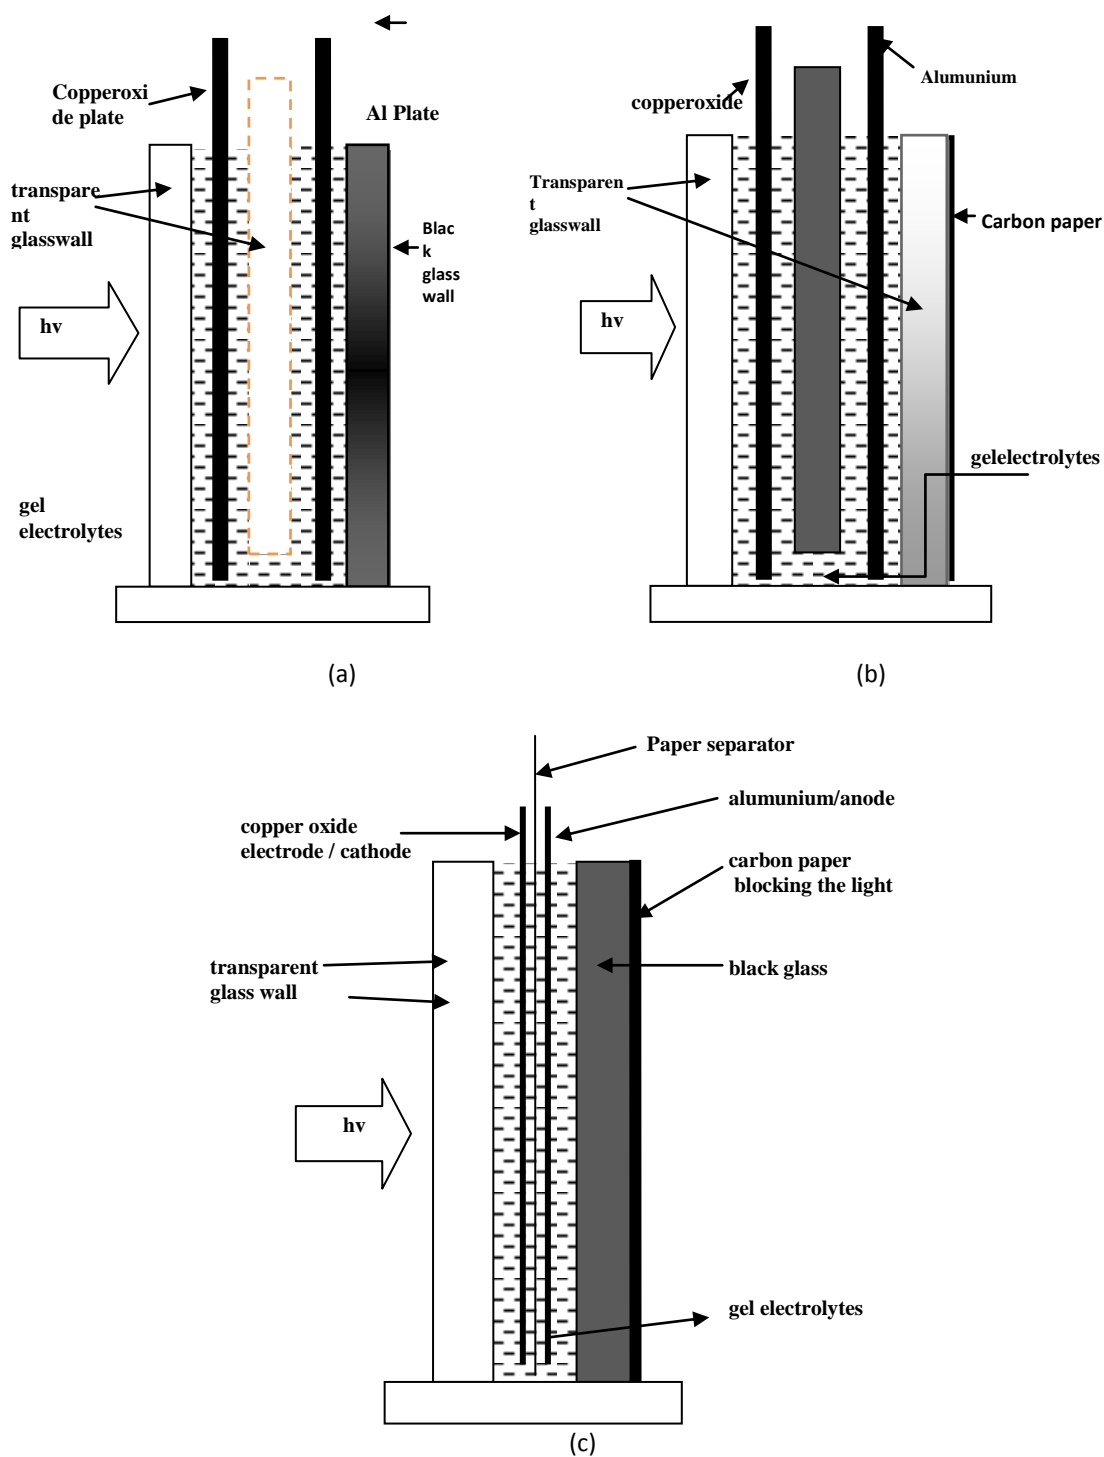



Figure 1: Schematic design for the design of PV cells 1 (a), the design of 2 (b) and design 3 (c)

## RESULTS AND DISCUSSION

### SEM EDX analysis

From Fig. 2, it appears there is a change on the surface of the Cu plate before and after calcination. From EDX analysis indicated in Table 1, note an increase in the amount of oxygen on the surface of the Cu plate originally 1.22 percent. In the calcination temperature of 400°C obtained for 16.5 percent oxygen. At 500°C, percent oxygen on the surface of the Cu plate by 15.27 percent. This result indicate that Cu plate after calcination at 400°C has more CuO at the surface compare with Cu plate after calcination at 500 °C.

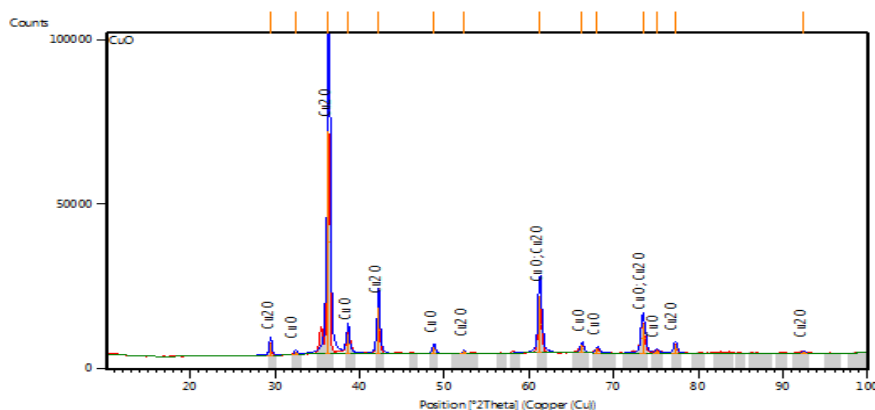


**Table 1: Results of EDX copper plates before calcination and after calcination at temperatures of 400 ° C and 500 ° C**

| Element | Weight percent |          |          |
|---------|----------------|----------|----------|
|         | Calcination    |          |          |
|         | Without        | 400°C    | 500°C    |
| Carbon  | 10.46667       | 10.45    | 6.7      |
| Oxygen  | 1.226667       | 16.34    | 15.27667 |
| Copper  | 88.31          | 73.20667 | 78.02333 |

### XRD analysis

From Fig. 3. seen the peak of the curve is formed which indicates the formation of copper oxide compounds. From Table 2, it is known that a compound formed by 26.7 percent CuO and Cu<sub>2</sub>O at 73.3 percent. From this result was obtained, there two kind of copper oxide was formed, CuO and Cu<sub>2</sub>O. This two compound was formed because under temperature 1000°C will form mixture of CuO and Cu<sub>2</sub>O, while Cu<sub>2</sub>O was formed first and followed by CuO. (12)



**Fig 3: XRD Results copper plate after calcination at a temperature of 400°C**


**Table 2: Results of XRD copper plates after calcinatingat a temperature of 400°C**

| Formula           | Percent | Compound     |
|-------------------|---------|--------------|
| CuO               | 26.7%   | Copper Oxide |
| Cu <sub>2</sub> O | 73.3%   | Copper Oxide |

### Current and Voltage Measurement results PV Cells

#### Current and voltage with temperature variations calcinations

From the results of current and voltage measurements with calcination temperature variations was obtained optimum conditions at temperature 400°C. This result also obtained by Sears in preparation Cu<sub>2</sub>O via thermal treatment. He said Higher temperatures produced too thick or too non-uniform a layer, whereas lower temperature oxide layers were too thin. (13) At temperature 400°C, the PV cell electrode pair Cu<sub>2</sub>O/Cu provide daily average current at indoor lights is 13.6  $\mu$ A and voltage of 28.28 mV. Power output reached 116  $\mu$ Watt/m<sup>2</sup>.

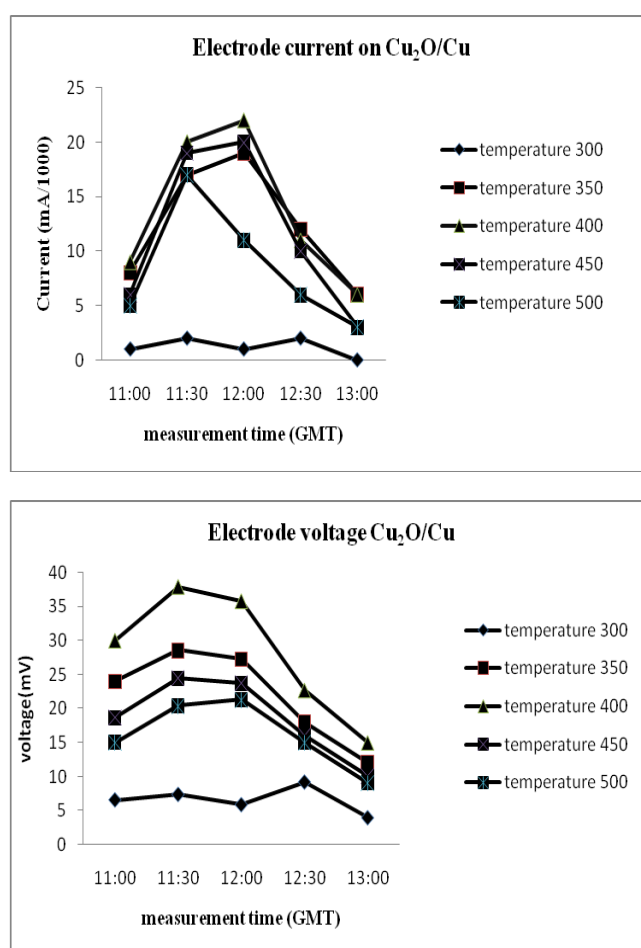
**Figure 4: Graph current and voltage of the PV cell electrode pair Cu<sub>2</sub>O/Cu at the calcinations temperature variations**

#### Current and voltage with a variation of PV cell design

From the results of current and voltage measurements with various designs of PV cells was obtained optimum conditions in the PV Cells Design 3. In the design of PV cells 3, the pair of electrodes Cu<sub>2</sub>O/Cu provide a daily average current at indoor lights is 28.2  $\mu$ A and a voltage of 36.5 mV. Power output reached 277.4  $\mu$ Watt/m<sup>2</sup>. PV cells with using design cells number 3 has the best performance because in this design, both electrodes have a small distance. Small distance between electrode can improve performance of photovoltaic

cell, this result also obtained by Chang, in his experiment was found that electrode distances can enhance the short-circuit current density ( $J_{sc}$ ) and thereby conversion efficiency.(14)

### Current and voltage PV cells with an electrode pair $Cu_2O/Cu$ and $Cu_2O/Al$


From the results of current and voltage measurements with the PV Cells electrode pair  $Cu_2O/Cu$  produced a daily average current of 28.2  $\mu A$  and 36.5 mV voltage at indoor lights, and with electrode pair  $Cu_2O/Al$  is 600  $\mu A$  and 635 mV . In the PV cell electrode pair  $Cu_2O/Cu$  under indoor lights irradiation, generated daily averages current 35  $\mu A$  and voltage 36 mV, with electrode pair  $Cu_2O/Al$  generated daily averages current 318.3  $\mu A$  and 438.7 mV. Power output of PV cell electrode pair  $Cu_2O/Cu$  reached 0.28 mWatt/ $m^2$  under indoor lights and 0.34 mWatt/ $m^2$  under neon lights, and power output of  $Cu_2O/Al$  reached 50.6 mWatt/ $m^2$  at indoor lights and 41.6 mWatt/ $m^2$  for neon lights. This result because  $Cu_2O$  is a natural semiconductor type P. If we use  $Cu_2O/Cu$ , Cu will accelerate recombination hole and electron because Cu has positive reduction potential, it contrast with Al with negative reduction potential.(15)

### Circuit of PV cells in series and parallel

From the results of current and voltage measurements under irradiation sun lights which enter to the room, on the circuit of several PV Cells electrode pairs  $Cu_2O/Al$  produced a daily average current is 482  $\mu A$  and voltage is 1575 mV for 3 series arrangement of cells. At 5 and 7 series arrangement each cell produced current 400  $\mu A$ , 431  $\mu A$ , and the voltage of each cell is 2340 mV, 3580 mV. In the parallel arrangement of the PV cell 10 electrode pairs  $Cu_2O/Al$  produced current 2330  $\mu A$  current and voltage 580 mV. At 7 series arrangement of PV cells, obtained a power of 415.7855 mWatt/ $m^2$ .

**Table 3: The results of the current and voltage measurement electrodes daily average  $Cu_2O / Cu$  at the calcination temperature variations**

| Temperature ( $^{\circ}C$ ) | I ( $\mu A$ ) | V (mV) | Daya ( $\mu W$ ) | Daya ( $\mu W/m^2$ ) |
|-----------------------------|---------------|--------|------------------|----------------------|
| 300                         | 1.2           | 6.62   | 0.00914          | 2.462948             |
| 350                         | 12.4          | 21.98  | 0.29698          | 80.02695             |
| 400                         | 13.6          | 28.28  | 0.43106          | 116.1574             |
| 450                         | 11.6          | 18.58  | 0.24834          | 66.91997             |
| 500                         | 8.4           | 16.14  | 0.15462          | 41.66532             |

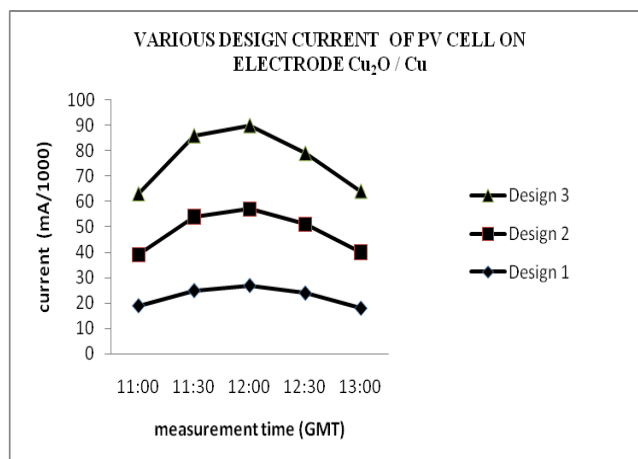

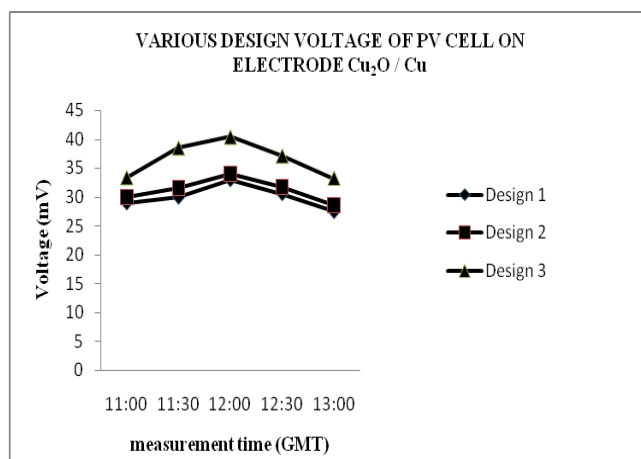


Figure 5: Graph of current and voltage of the electrode pair  $\text{Cu}_2\text{O}/\text{Cu}$  at various PV cell design.

Table 4: The results of the current and voltage measurement electrodes daily average  $\text{Cu}_2\text{O}/\text{Cu}$  in various designs PV Cells

| PV Design | I ( $\mu\text{A}$ ) | V (mV) | Daya ( $\mu\text{W}$ ) | Daya ( $\mu\text{W}/\text{m}^2$ ) |
|-----------|---------------------|--------|------------------------|-----------------------------------|
| 1         | 22.6                | 30.02  | 0.678452               | <b>182.8218809</b>                |
| 2         | 25.6                | 31.16  | 0.797696               | <b>214.9544597</b>                |
| 3         | 28.2                | 36.5   | 1.0293                 | <b>277.3645918</b>                |

Table 5: The results of the current and voltage measurement electrodes daily average  $\text{Cu}_2\text{O}/\text{Al}$  on the lights source used

| Cell           | Under indoorlights irradiation |              |                          | Under neon lights irradiation |              |                          |
|----------------|--------------------------------|--------------|--------------------------|-------------------------------|--------------|--------------------------|
|                | Current( $\mu\text{A}$ )       | Volt (mV)    | P (mWatt/ $\text{m}^2$ ) | current( $\mu\text{A}$ )      | Volt (mV)    | P (mWatt/ $\text{m}^2$ ) |
| Sel 1          | 200                            | 580          | 31.25842                 | 113                           | 536          | 16.32121                 |
| Sel 2          | 257                            | 581          | 40.23632                 | 235                           | 407          | 25.77338                 |
| Sel 3          | 121                            | 353          | 11.50984                 | 120                           | 280          | 9.054163                 |
| Sel 4          | 980                            | 635          | 167.6906                 | 988                           | 606          | 161.3387                 |
| Sel 5          | 167                            | 486          | 21.87065                 | 166                           | 395          | 17.66909                 |
| Sel 6          | 258                            | 454          | 31.56346                 | 231                           | 380          | 23.654                   |
| Sel 7          | 315                            | 473          | 40.14956                 | 371                           | 367          | 36.69011                 |
| Sel 8          | 273                            | 500          | 36.78254                 | 350                           | 516          | 48.66613                 |
| Sel 9          | 600                            | 635          | 102.6677                 | 361                           | 548          | 53.30854                 |
| Sel 10         | 201                            | 401          | 21.71948                 | 248                           | 352          | 23.52358                 |
| <b>Average</b> | <b>337.2</b>                   | <b>509.8</b> | <b>50.54487</b>          | <b>318.3</b>                  | <b>438.7</b> | <b>41.59989</b>          |

Table 6: Results Measurement of current and voltage in series and parallel from multiple cell electrode pairs  $\text{Cu}_2\text{O}/\text{Al}$ .

| circuit           | current( $\mu\text{A}$ ) | Volt (mV) | Power(mW) | Power(mW/ $\text{m}^2$ ) |
|-------------------|--------------------------|-----------|-----------|--------------------------|
| Series 3 cells    | 482                      | 1575      | 0.75915   | 204.5675                 |
| Series 5 cells    | 400                      | 2340      | 0.936     | 252.2231                 |
| Series 7 cells    | 431                      | 3580      | 1.54298   | 415.7855                 |
| Parallel 10 cells | 2330                     | 580       | 1.3514    | 364.1606                 |

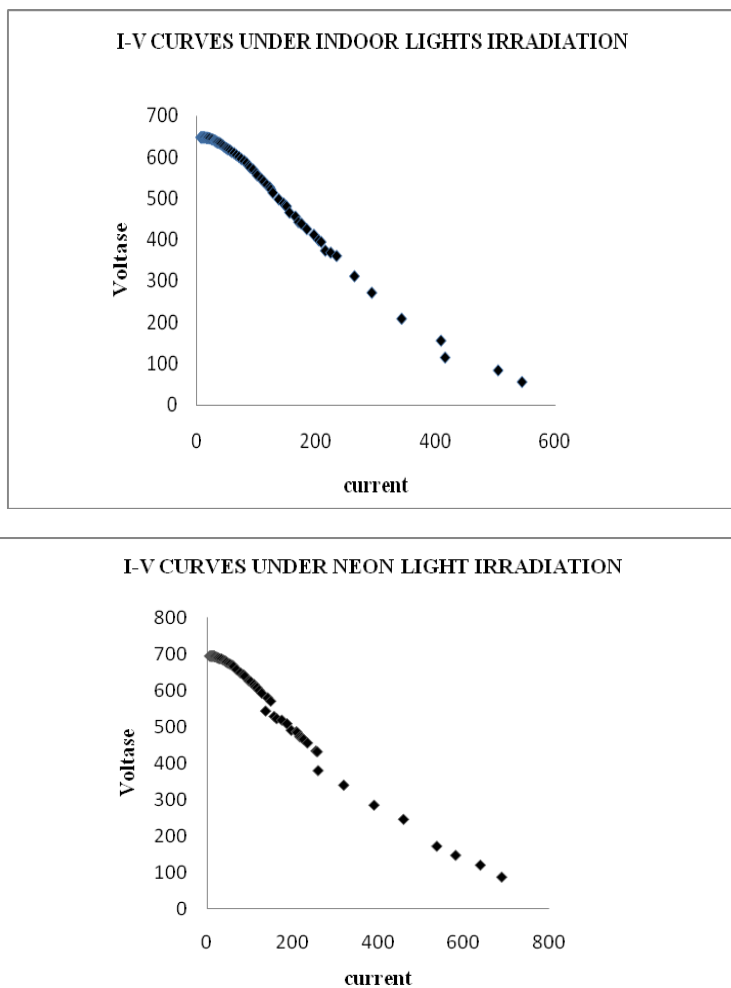


Figure 6: Current and voltage curves of the electrode pair  $\text{Cu}_2\text{O}/\text{Al}$  under indoor lights irradiation and neonlights irradiation

Table 7: I-V Characteristic Curve; Open circuit currents ( $I_{oc}$ ), the open circuit voltage ( $V_{oc}$ ), Maximum Flow ( $I_{max}$ ), maximum voltage ( $V_{max}$ ), Value Fill Factor (FF) and efficiency of PV Cells ( $\eta$ )

| under indoor lights irradiation on $\text{Cu}_2\text{O}/\text{Al}$ |          |           |           |          |            |
|--|----------|-----------|-----------|----------|------------|
| $I_{oc}$   | $V_{oc}$ | $I_{max}$ | $V_{max}$ | FF       | $\eta$ (%) |
| 337.2  | 509.8    | 690       | 694       | 2.785615 | 0.752      |
| under neon lights irradiation on $\text{Cu}_2\text{O}/\text{Al}$   |          |           |           |          |            |
| $I_{oc}$   | $V_{oc}$ | $I_{max}$ | $V_{max}$ | FF       | $\eta$ (%) |
| 318.3  | 438.7    | 545       | 647       | 2.525204 | 1.3        |
| under indoorlights irradiation on $\text{Cu}_2\text{O}/\text{Cu}$  |          |           |           |          |            |
| $I_{oc}$   | $V_{oc}$ | $I_{max}$ | $V_{max}$ | FF       | $\eta$ (%) |
| 20.2   | 28.55    | 46        | 36        | 2.871461 | 0.00618    |
| under neon lights irradiation on $\text{Cu}_2\text{O}/\text{Cu}$   |          |           |           |          |            |
| $I_{oc}$   | $V_{oc}$ | $I_{max}$ | $V_{max}$ | FF       | $\eta$ (%) |
| 18   | 22       | 39        | 37        | 3.643939 | 0.00424    |



### I-V measurement

Table 7 shown the efficiency of PV cell with electrodes  $\text{Cu}_2\text{O}/\text{Al}$  under irradiation neon lights was bigger than under irradiation sun lights which enter into the room, this occur because intensity of neon lights is bigger than sun lights which enter into the room.

### CONCLUSION

From result of this research can concluded was PV cell with design number 3 is the best design. PV cell with electrode  $\text{Cu}_2\text{O}/\text{Al}$  was given the best performance compare with PV cell with electrodes  $\text{Cu}_2\text{O}/\text{Cu}$ . Maximum voltage of PV cell with electrode  $\text{Cu}_2\text{O}/\text{Al}$  was generated is 0.988 mV and maximum current is 0.635 mA and efficiency 1.3 % under neon lights and 0.752 % under indoor lights.

### REFERENCES

- [1] Pang SH, Frey HC, Rasdorf WJ. 2009. Environmental science & technology 43:6398-405
- [2] Stephenson AL, Dupree P, Scott SA, Dennis JS. 2010. Bioresource technology 101:9612-23
- [3] Edwards PP, Kuznetsov VL, David WI. 2007. Series A, Mathematical, physical, and engineering sciences 365:1043-56
- [4] Zuttel A, Remhof A, Borgschulte A, Friedrichs O. 2010. Series A, Mathematical, physical, and engineering sciences 368:3329-42
- [5] Mudimu O, Rybalka N, Bauersachs T, Born J, Friedl T, Schulz R. 2014. Metabolites 4:373-93
- [6] Mills N, Pearce P, Farrow J, Thorpe RB, Kirkby NF. 2014. Waste management 34:185-95
- [7] Irimia-Vladu M. 2014. Chemical Society reviews 43:588-610
- [8] Haber W. 2007. Environmental science and pollution research international 14:359-65
- [9] Aresta M, Dibenedetto A, Angelini A. 2013. Series A, Mathematical, physical, and engineering sciences 371:20120111
- [10] Parlevliet D, Moheimani NR. 2014. Efficient conversion of solar energy to biomass and electricity. Aquatic biosystems 10:4
- [11] Swierk JR, Mallouk TE. 2013. Chemical Society reviews 42:2357-87
- [12] Musa. AO, Akomolafe T, Carter MJ. 1998. Solar Energy Materials and Solar Cells 51:305—16
- [13] W.M. Sears, Fortin E. 1984. Solar Energy Materials 10 93-103
- [14] Ping-Kuan Chang, Ting-Wei Kuo, Mau-Phon Houn, Chun-Hsiung Lu, Yeh C-H. 2012. IEEE journal 978-1-4577-1829
- [15] Chien-Lin Kuo R-C, Jow-Lay Huang, Chuan-Pu Liu<sup>1</sup>, Chun-Kai Wang, Sheng-Po Chang, Wen-Huei Chu. 2009. Nanotechnology 20 (2009) 365603 (5pp):365603 (5pp)

# *Research Journal of Pharmaceutical, Biological and Chemical Sciences*

(An International Research Online Journal)

ISSN:0975-8585





Search

Home

Scope

Editorial Board

Author's Guidelines

Submit Manuscript

Archives

Contact Us



Invitation for Innovative Research Papers, Reviews, Mini Reviews and Short Communication

Welcome To RJPBCS

[Impact Factor 0.35]

Inviting National and International Conferences / Proceedings  
for special issue contact. editor.rjpbcs@gmail.com



The "Research Journal of Pharmaceutical, Biological and Chemical Sciences (RJPBCS)" is an international online journal in English published Bimonthly. The aim of RJPBCS is to publish peer reviewed research and review articles in rapidly developing field of Pharmaceutical, Biological and Chemical sciences. The journal aims to cover the latest outstanding developments in the field of Pharmaceutical, Biological and Chemical Sciences.

Research Journal of  
Pharmaceutical, Biological  
and Chemical Sciences

Indicator 2007-2014 Value

SJR 0.16

Cites  
per doc 0.18

Total  
cites 373

www.scimagojr.com

Indexed and Abstracted in:

Scopus, Embase (Elsevier) SCIMAGO, CAS, ROAD, CABI,  
Google Scholar, Open J-Gate, Biblioteca, Science  
Central, Index Scholar, AYUSH Research Portal etc.,

In Current Issue:

RES J PHARM BIOL CHEM SCI

Volume 7, Issue 1, 2016 (January - February)

Downloads:

Copy Right Transfer Form [Download Now!](#)

Model Coverining Letter [Download Now!](#)

Research Journal of Pharmaceutical,  
Biological and Chemical Sciences

(An International Research Online Journal)

ISSN:0975-8585





Search

[Home](#)

[Scope](#)

[Editorial Board](#)

[Author's Guidelines](#)

[Submit Manuscript](#)

[Archives](#)

[Contact Us](#)



Invitation for Innovative Research Papers, Reviews, Mini Reviews and Short Communication

## Scope

The "**Research Journal of Pharmaceutical, Biological and Chemical Sciences (RJPBCS)**" is an international online journal in English published Bimonthly. The aim of RJPBCS is to publish peer reviewed research and review articles in rapidly developing field of Pharmaceutical, Biological and Chemical sciences. The journal aims to cover the latest outstanding developments in the field of Pharmaceutical, Biological and Chemical specifically in the following branches:

### Pharmaceutical Sciences:

- » Pharmacology and Toxicology
- » Pharmaceutical Chemistry & Drug Design
- » Pharmaceutical Analysis and Quality Assurance
- » Pharmaceutics
- » Pharmaceutical Nanotechnology
- » Novel Drug Delivery Systems
- » Hospital and Clinical Pharmacy
- » Pharmacognosy and Phytochemistry
- » Pharmaceutical Microbiology and Biotechnology
- » Alternative Medicines
- » Industrial Pharmacy

### Chemical Sciences:

- » Environmental Sciences
- » Organic and Inorganic Chemistry
- » Physical Chemistry
- » Agriculture, Soil and Pesticides
- » Food Sciences
- » Polymer Sciences

### Biological Sciences:

- » Medical Sciences
- » Microbiology
- » Biochemistry
- » Biotechnology
- » Bioinformatics
- » Stem Cell Research
- » Cell Biology
- » Immunology
- » Animal Sciences
- » Plant Biology

"RJPBCS takes responsibility of in time publication of the Manuscript abide by the journal policy".

RJPBCS hopes that Researchers, Research scholars, Academician, Industrialists, Consultancy etc. would make use of this journal publication for the development of science and technology.





Search

[Home](#)

[Scope](#)

[Editorial Board](#)

[Author's Guidelines](#)

[Submit Manuscript](#)

[Archives](#)

[Contact Us](#)



Invitation for Innovative Research Papers, Reviews, Mini Reviews and Short Communication

## Editorial Board

### *Editor-in-Chief (Hon.)*

**Dr. Girish G**  
**United Kingdom**

### *Associated Editor (Hon.)*

**Dr.K.Lakshmi Narayana**  
**India**

### *Managing Editor*

**Prof. Gopkumar P**  
**India**

### *Editorial Advisory Board Members*

#### *Egypt*

**Prof. Jeanetta du Plessis,**  
**South Africa**

**Prof. Dr. Qinghua Xia,**  
**China**

**Dr.U. Michael Uwumagbe,**  
**Nigeria**

**Prof. Dr. Suleyman Aydin,**  
**Turkey**

**Dr. Nabil Mohie Abdel-Hamid,**  
**Egypt**

**Dr. Aravind B,**  
**India**

**Mrs. Sridevi G,**  
**India**

**Dr.Amrutha Radhakrishnan,**  
**India**

**Dr. Vandana B. Patel,**  
**India**

**Dr. Shashikanth Pattan,**  
**India**

**Dr. Sayeeda Sultana,**  
**India**

**Prof.Dr.Cemil Ibis,**  
**Turkey**

**Mr.J.S.Patil,**  
**India**

**Prof.Dr.Liviu Mitu,**  
**Romania**

**Dr.Zambare Vasu deo P,**  
**USA**

**Dr.(Mrs). Sanjita Das,**  
**India**

**Dr. Kundlik Girhepunje,**  
**India**

**Dr. Bhaskar Muzumder,**  
**India**

**Prof.Dr. Ch.V.R.Murthy,**  
**India**

**Dr. Subhash C. Mandal,**  
**India**

**Dr.Prabhakar Reddy Veerareddy,**  
**India**

**Dr. Mahesh Kumar Gupta,**  
**India**

**Prof. Dr. Suvakanta Dash,**  
**India**

**Dr. C.S. Shastri,**  
**India**

**Dr. Derle DV,**  
**India.**

**Prof. Dr. Raghavendra Kulkarni,**  
**India**

**Dr. Saikat Dewanjee,**  
**India**

**Dr. Shailesh T. Prajapati,**  
**India**

**Dr.G.S.Gadaginamath,**  
**India**

**Dr.Tanay Kesharwani,**  
**USA**

**Dr.Pengyun Zeng,**  
**USA**

**Dr.Yatin Shukla,**  
**USA**

**Mr.D.Nagasamy Venkatesh,**  
**India**

**Dr.Amit G Nerkar,**  
**India**

**Dr. Ajay Singh,**  
**India**

**Prof. (Dr) Abdalla Shalaby,**  
**Egypt**

**Dr. Ashok R Chandak,**  
**India**

**Prof (Dr). Bhupen Chandra Behera,**  
**India**

**Dr.Hiren Mehta, India,**  
**India**

**Dr.Sitaram Bhavaraju,**  
**Maryland**

**Dr.SP Singh,**  
**Japan**

**Mr.Ritu mehra Gilhotra,**  
**India**

**Mr.Devang S Patel,**  
**India**

**Dr.Mr.Jayapal,**  
**India**

**Prof.Dr.Ragip Adiguzel,**  
**Turkey**

**Dr.C.Gopinath,**  
**India**

**Dr.Arugadoss Devakumar,**  
**USA**

**Dr.Tarek Saied Fathalla Bellal,**  
**Egypt**



Search

[Home](#)

[Scope](#)

[Editorial Board](#)

[Author's Guidelines](#)

[Submit Manuscript](#)

[Archives](#)

[Contact Us](#)



Invitation for Innovative Research Papers, Reviews, Mini Reviews and Short Communication

## Contact Us



### Feed Back Form

Name:

Subject:

Email ID:

Phone No.:

Location:

Message:



Search

[Home](#)

[Scope](#)

[Editorial Board](#)

[Author's Guidelines](#)

[Submit Manuscript](#)

[Archives](#)

[Contact Us](#)



Invitation for Innovative Research Papers, Reviews, Mini Reviews and Short Communication

## Archives

### Periodical Volume (Issue)

| Year      | 2014 | 2015 | 2016 | 2017 |
|-----------|------|------|------|------|
| Jan - Feb | 5(1) | 6(1) | 7(1) | 8(1) |
| Mar - Apr | 5(2) | 6(2) | 7(2) | 8(2) |
| May - Jun | 5(3) | 6(3) | 7(3) | 8(3) |
| Jul - Aug | 5(4) | 6(4) | 7(4) | 8(4) |
| Sep - Oct | 5(5) | 6(5) | 7(5) | 8(5) |
| Nov - Dec | 5(6) | 6(6) | 7(6) | 8(6) |

| Year      | 2010 | 2011 | 2012 | 2013 |
|-----------|------|------|------|------|
| Jan - Mar | 1(1) | 2(1) | 3(1) | 4(1) |
| Apr - Jun | 1(2) | 2(2) | 3(2) | 4(2) |
| Jul - Sep | 1(3) | 2(3) | 3(3) | 4(3) |
| Oct - Dec | 1(4) | 2(4) | 3(4) | 4(4) |

Research Journal of Pharmaceutical,  
Biological and Chemical Sciences

(An International Research Online Journal)

ISSN:0975-8585







Search

[Home](#)

[Scope](#)

[Editorial Board](#)

[Author's Guidelines](#)

[Submit Manuscript](#)

[Archives](#)

[Contact Us](#)



*Analytical Chemistry*

Invitation for Innovative Research Papers, Reviews, Mini Reviews and Short Communication

**Submit Manuscript**

Submit manuscript to

[editor.rjpbcs@gmail.com](mailto:editor.rjpbcs@gmail.com)

[editor@rjpbcs.com](mailto:editor@rjpbcs.com)

